

# Proving a compiler

Mechanized verification of program transformations and static analyses

Xavier Leroy

INRIA Paris-Rocquencourt

Oregon Programming Languages summer school 2012

# Part I

Prologue: mechanized semantics, what for?

# Formal semantics of programming languages

Provide a mathematically-precise answer to the question

*What does this program do, exactly?*

## What does this program do, exactly?

```
#include <stdio.h>
int l;int main(int o,char **0,
int I){char c,*D=0[1];if(o>0){
for(l=0;D[l]          ];D[l
++]--=10){D  [l++]--=120;D[l]--=
110;while  (!main(0,0,l))D[l]
+=  20;  putchar((D[l]+1032)
/20  )  ;}putchar(10);}else{
c=o+      (D[I]+82)%10-(I>1/2)*
(D[I-1+I]+72)/10-9;D[I]+=I<0?0
:!(o=main(c/10,0,I-1))*((c+999
)%10-(D[I]+92)%10);}return o;}
```

*(Raymond Cheong, 2001)*

## What does this program do, exactly?

```
#include <stdio.h>
int l;int main(int o,char **0,
int I){char c,*D=0[1];if(o>0){
for(l=0;D[l]          ];D[l
++]-=10){D[l++]-=120;D[l]-=
110;while (!main(0,0,l))D[l]
+= 20; putchar((D[l]+1032)
/20 ) );putchar(10);}else{
c=o+ (D[I]+82)%10-(I>1/2)*
(D[I-1+I]+72)/10-9;D[I]+=I<0?0
:!(o=main(c/10,0,I-1))*((c+999
)%10-(D[I]+92)%10);}return o;}
```

*(Raymond Cheong, 2001)*

(It computes arbitrary-precision square roots.)

## What about this one?

```
#define crBegin static int state=0; switch(state) { case 0:  
#define crReturn(x) do { state=__LINE__; return x; \  
                        case __LINE__;; } while (0)  
#define crFinish }
```

```
int decompressor(void) {  
    static int c, len;  
    crBegin;  
    while (1) {  
        c = getchar();  
        if (c == EOF) break;  
        if (c == 0xFF) {  
            len = getchar();  
            c = getchar();  
            while (len--) crReturn(c);  
        } else crReturn(c);  
    }  
    crReturn EOF;  
    crFinish;  
}
```

*(Simon Tatham,  
author of PuTTY)*

## What about this one?

```
#define crBegin static int state=0; switch(state) { case 0:  
#define crReturn(x) do { state=__LINE__; return x; \  
                        case __LINE__;; } while (0)  
#define crFinish }
```

```
int decompressor(void) {  
    static int c, len;  
    crBegin;  
    while (1) {  
        c = getchar();  
        if (c == EOF) break;  
        if (c == 0xFF) {  
            len = getchar();  
            c = getchar();  
            while (len--) crReturn(c);  
        } else crReturn(c);  
    }  
    crReturn(EOF);  
    crFinish;  
}
```

*(Simon Tatham,  
author of PuTTY)*

*(It's a co-routined version of a  
decompressor for run-length  
encoding.)*

# Why indulge in formal semantics?

- An intellectually challenging issue.
- When English prose is not enough.  
(e.g. language standardization documents.)
- A prerequisite to formal program verification.  
(Program proof, model checking, static analysis, etc.)
- A prerequisite to building reliable “meta-programs”  
(Programs that operate over programs: compilers, code generators, program verifiers, type-checkers, . . . )

## Is this program transformation correct?

```
struct list { int head; struct list * tail; };
```

```
struct list * foo(struct list ** p)
```

```
{  
    return ((*p)->tail = NULL);
```

```
    (*p)->tail = NULL;  
    return (*p)->tail;
```

```
}
```

## Is this program transformation correct?

```
struct list { int head; struct list * tail; };
```


```
struct list * foo(struct list ** p)
```

```
{  
    return ((*p)->tail = NULL);
```

```
    (*p)->tail = NULL;  
    return (*p)->tail;
```

```
}
```

No, not if  $p == \&(l.tail)$  and  $l.tail == \&l$  (circular list).



## What about this one?

```
double dotproduct(int n, double * a, double * b)
{
    double dp = 0.0;
    int i;
    for (i = 0; i < n; i++) dp += a[i] * b[i];
    return dp;
}
```

Compiled for the Alpha processor with all optimizations and manually decompiled back to C...

```

double dotproduct(int n, double * a, double * b)
{
    double dp, a0, a1, a2, a3, b0, b1, b2, b3;
    double s0, s1, s2, s3, t0, t1, t2, t3;
    int i, k;
    dp = 0.0;
    if (n <= 0) goto L5;
    s0 = s1 = s2 = s3 = 0.0;
    i = 0; k = n - 3;
    if (k <= 0 || k > n) goto L19;
    i = 4; if (k <= i) goto L14;
    a0 = a[0]; b0 = b[0]; a1 = a[1]; b1 = b[1];
    i = 8; if (k <= i) goto L16;
L17: a2 = a[2]; b2 = b[2]; t0 = a0 * b0;
    a3 = a[3]; b3 = b[3]; t1 = a1 * b1;
    a0 = a[4]; b0 = b[4]; t2 = a2 * b2; t3 = a3 * b3;
    a1 = a[5]; b1 = b[5];
    s0 += t0; s1 += t1; s2 += t2; s3 += t3;
    a += 4; i += 4; b += 4;
    prefetch(a + 20); prefetch(b + 20);
    if (i < k) goto L17;
L16: s0 += a0 * b0; s1 += a1 * b1; s2 += a[2] * b[2]; s3 += a[3] * b[3];
    a += 4; b += 4;
    a0 = a[0]; b0 = b[0]; a1 = a[1]; b1 = b[1];
L18: s0 += a0 * b0; s1 += a1 * b1; s2 += a[2] * b[2]; s3 += a[3] * b[3];
    a += 4; b += 4;
    dp = s0 + s1 + s2 + s3;
    if (i >= n) goto L5;
L19: dp += a[0] * b[0];
    i += 1; a += 1; b += 1;
    if (i < n) goto L19;
L5: return dp;
L14: a0 = a[0]; b0 = b[0]; a1 = a[1]; b1 = b[1]; goto L18;
}

```

```

if (n <= 0) goto L5;
s0 = s1 = s2 = s3 = 0.0;
i = 0; k = n - 3;
if (k <= 0 || k > n) goto L19;
i = 4; if (k <= i) goto L14;
a0 = a[0]; b0 = b[0]; a1 = a[1]; b1 = b[1];
i = 8; if (k <= i) goto L16;
L17: a2 = a[2]; b2 = b[2]; t0 = a0 * b0;
a3 = a[3]; b3 = b[3]; t1 = a1 * b1;
a0 = a[4]; b0 = b[4]; t2 = a2 * b2; t3 = a3 * b3;
a1 = a[5]; b1 = b[5];
s0 += t0; s1 += t1; s2 += t2; s3 += t3;
a += 4; i += 4; b += 4;
prefetch(a + 20); prefetch(b + 20);
if (i < k) goto L17;
L16: s0 += a0 * b0; s1 += a1 * b1; s2 += a[2] * b[2]; s3 += a[3] * b[3];
a += 4; b += 4;
a0 = a[0]; b0 = b[0]; a1 = a[1]; b1 = b[1];
L18: s0 += a0 * b0; s1 += a1 * b1; s2 += a[2] * b[2]; s3 += a[3] * b[3];
a += 4; b += 4;
dp = s0 + s1 + s2 + s3;

```

# Proof assistants

- Implementations of well-defined mathematical logics.
- Provide a specification language to write definitions and state theorems.
- Provide ways to build proofs in interaction with the user. (Not fully automated proving.)
- Check the proofs for soundness and completeness.

Some mature proof assistants:

ACL2	HOL	PVS
Agda	Isabelle	Twelf
Coq	Mizar	

## Using proof assistants to mechanize semantics

Formal semantics for realistic programming languages are large (but shallow) formal systems.

Computers are better than humans at checking large but shallow proofs.

✘ *The proofs of the remaining 18 cases are similar and make extensive use of the hypothesis that [...]*

✔ *The proof was mechanically checked by the XXX proof assistant. This development is publically available for review at <http://...>*

## This lecture

Using the Coq proof assistant, formalize some representative program transformations and static analyses, and prove their correctness.

In passing, introduce the semantic tools needed for this effort.

## Lecture material

<http://gallium.inria.fr/~xleroy/courses/Eugene-2012/>

- The Coq development (source archive + HTML view).
- These slides.

# Contents

- 1 Compiling IMP to a simple virtual machine; first compiler proofs.
- 2 Notions of semantic preservation.
- 3 More on semantics: big-step, small-step, small-step with continuations.
- 4 Finishing the proof of the  $\text{IMP} \rightarrow \text{VM}$  compiler.
- 5 An example of optimizing program transformation and its correctness proof: dead code elimination, with extension to register allocation.
- 6 A generic static analyzer (or: abstract interpretation for dummies).
- 7 Compiler verification “in the large”: the CompCert C compiler.

## Part II

# Compiling IMP to virtual machine code

# Compiling IMP to virtual machine code

- 1 Reminder: the IMP language
- 2 The IMP virtual machine
- 3 The compiler
- 4 Verifying the compiler: first results

# Reminder: the IMP language

(Already introduced in Benjamin Pierce's "Software Foundations" course.)

A prototypical imperative language with structured control flow.

Arithmetic expressions:

$$a ::= n \mid x \mid a_1 + a_2 \mid a_1 - a_2 \mid a_1 \times a_2$$

Boolean expressions:

$$b ::= \text{true} \mid \text{false} \mid a_1 = a_2 \mid a_1 \leq a_2 \\ \mid \text{not } b \mid b_1 \text{ and } b_2$$

Commands (statements):

$c ::= \text{SKIP}$	(do nothing)
$\mid x ::= a$	(assignment)
$\mid c_1; c_2$	(sequence)
$\mid \text{IFB } b \text{ THEN } c_1 \text{ ELSE } c_2 \text{ FI}$	(conditional)
$\mid \text{WHILE } b \text{ DO } c \text{ END}$	(loop)

## Reminder: IMP's semantics

As defined in file `Imp.v` of “Software Foundations”:

- Evaluation function for arithmetic expressions

$$\text{aeval } st \ a : \text{nat}$$

- Evaluation function for boolean expressions

$$\text{beval } st \ b : \text{bool}$$

- Evaluation predicate for commands (in big-step operational style)

$$c/st \Rightarrow st'$$

( $st$  ranges over variable states:  $\text{ident} \rightarrow \text{nat}$ .)

# Execution models for a programming language

## ① Interpretation:

the program is represented by its abstract syntax tree. The interpreter traverses this tree during execution.

# Execution models for a programming language

## ① Interpretation:

the program is represented by its abstract syntax tree. The interpreter traverses this tree during execution.

## ② Compilation to native code:

before execution, the program is translated to a sequence of machine instructions, These instructions are those of a real microprocessor and are executed in hardware.

# Execution models for a programming language

## ① Interpretation:

the program is represented by its abstract syntax tree. The interpreter traverses this tree during execution.

## ② Compilation to native code:

before execution, the program is translated to a sequence of machine instructions, These instructions are those of a real microprocessor and are executed in hardware.

## ③ Compilation to virtual machine code:

before execution, the program is translated to a sequence of instructions, These instructions are those of a **virtual machine**. They do not correspond to that of an existing hardware processor, but are chosen close to the basic operations of the source language. Then,

- ① either the virtual machine instructions are interpreted (efficiently)
- ② or they are further translated to machine code (JIT).

# Compiling IMP to virtual machine code

- 1 Reminder: the IMP language
- 2 The IMP virtual machine**
- 3 The compiler
- 4 Verifying the compiler: first results

# The IMP virtual machine

Components of the machine:

- The code  $C$ : a list of instructions.
- The program counter  $pc$ : an integer, giving the position of the currently-executing instruction in  $C$ .
- The store  $st$ : a mapping from variable names to integer values.
- The stack  $\sigma$ : a list of integer values (used to store intermediate results temporarily).

# The instruction set

$i ::=$	$\text{Iconst}(n)$	push $n$ on stack
	$\text{Ivar}(x)$	push value of $x$
	$\text{Isetvar}(x)$	pop value and assign it to $x$
	$\text{Iadd}$	pop two values, push their sum
	$\text{Isub}$	pop two values, push their difference
	$\text{Imul}$	pop two values, push their product
	$\text{Ibranch\_forward}(\delta)$	unconditional jump forward
	$\text{Ibranch\_backward}(\delta)$	unconditional jump backward
	$\text{Ibeq}(\delta)$	pop two values, jump if =
	$\text{Ibne}(\delta)$	pop two values, jump if $\neq$
	$\text{Ible}(\delta)$	pop two values, jump if $\leq$
	$\text{Ibgt}(\delta)$	pop two values, jump if $>$
	$\text{Ihalt}$	end of program

By default, each instruction increments  $pc$  by 1. Exception: branch instructions increment it by  $1 + \delta$  (forward) or  $1 - \delta$  (backward).

( $\delta$  is a branch offset relative to the next instruction.)

## Example

<i>stack</i>	$\epsilon$	12	$\begin{matrix} 1 \\ 12 \end{matrix}$	13	$\epsilon$
<i>store</i>	$x \mapsto 12$	$x \mapsto 12$	$x \mapsto 12$	$x \mapsto 12$	$x \mapsto 13$
<i>p.c.</i>	0	1	2	3	4
<i>code</i>	Ivar( $x$ );	Iconst(1);	Iadd;	Isetvar( $x$ );	Ibranch_ backward(5)

## Semantics of the machine

Given by a transition relation (small-step), representing the execution of one instruction.

```
Definition code := list instruction.
```

```
Definition stack := list nat.
```

```
Definition machine_state := (nat * stack * state)%type.
```

```
Inductive transition (C: code):
```

```
    machine_state -> machine_state -> Prop :=
```

```
    ...
```

(See file `Compil.v`.)

## Executing machine programs

By iterating the transition relation:

- **Initial states:**  $pc = 0$ , initial store, empty stack.
- **Final states:**  $pc$  points to a halt instruction, empty stack.

```
Definition mach_terminates (C: code) (s_init s_fin: state) :=
  exists pc,
  code_at C pc = Some Ihalt /\
  star (transition C) (0, nil, s_init) (pc, nil, s_fin).
```

```
Definition mach_diverges (C: code) (s_init: state) :=
  infseq (transition C) (0, nil, s_init).
```

```
Definition mach_goes_wrong (C: code) (s_init: state) :=
  (* otherwise *)
```


(star is reflexive transitive closure. See file Sequences.v.)

# Compiling IMP to virtual machine code

- 1 Reminder: the IMP language
- 2 The IMP virtual machine
- 3 The compiler**
- 4 Verifying the compiler: first results

# Compilation of arithmetic expressions

General contract: if  $a$  evaluates to  $n$  in store  $st$ ,

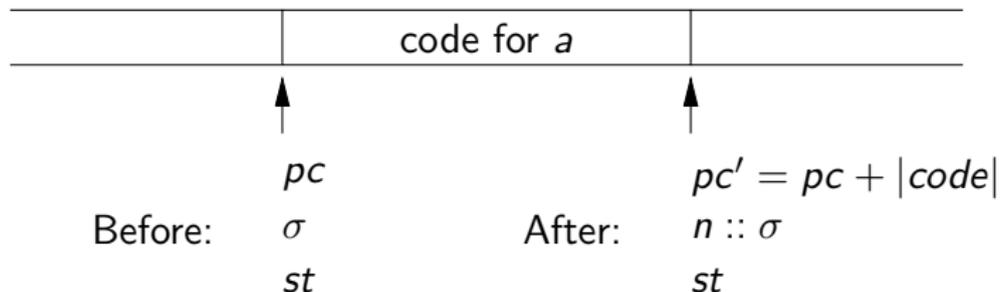


Compilation is just translation to “reverse Polish notation”.


(See function `compile_aexpr` in `Compil.v`)

# Compilation of arithmetic expressions

Base case: if  $a = x$ ,

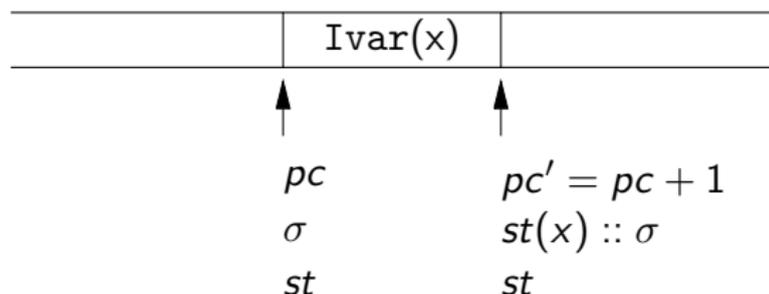

Recursive decomposition: if  $a = a_1 + a_2$ ,

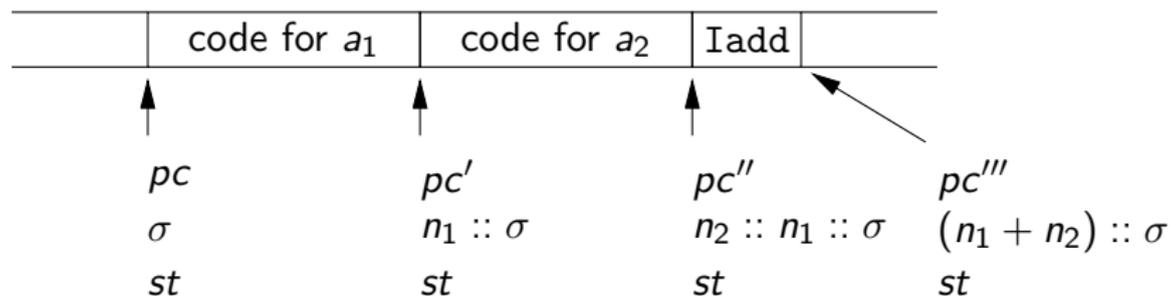


## Compilation of boolean expressions

`compile_bexp  $b$  cond  $\delta$` :

skip  $\delta$  instructions forward if  $b$  evaluates to boolean  $cond$

continue in sequence if  $b$  evaluates to boolean  $\neg cond$

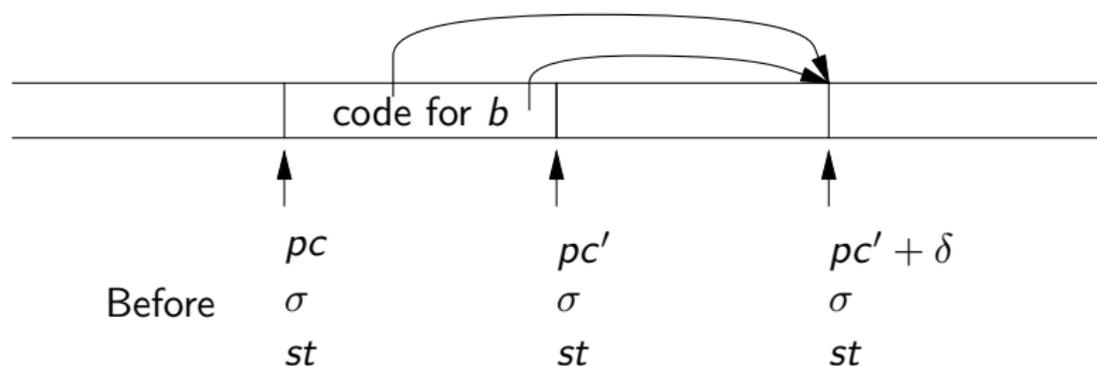


After (if result  $\neq cond$ )

After (if result =  $cond$ )

# Compilation of boolean expressions

A base case:  $b = (a_1 = a_2)$  and  $cond = true$ :

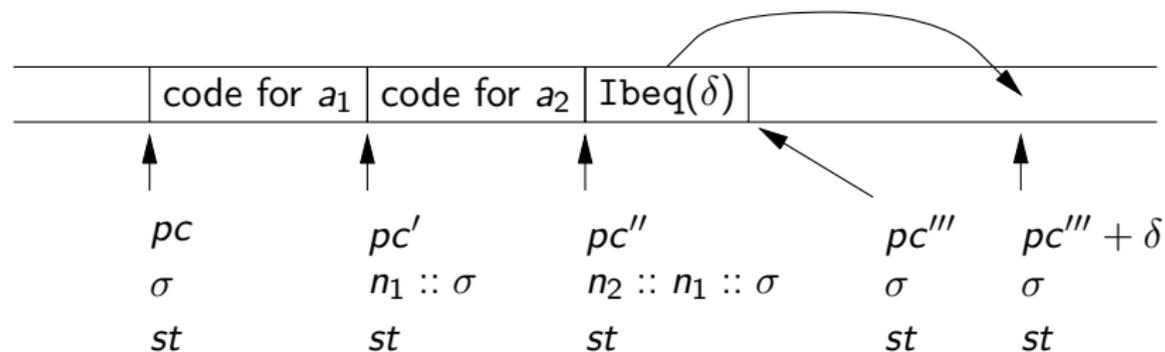


## Short-circuiting “and” expressions

If  $b_1$  evaluates to false, so does  $b_1$  and  $b_2$ : no need to evaluate  $b_2$ !


→ In this case, the code generated for  $b_1$  and  $b_2$  should skip over the code for  $b_2$  and branch directly to the correct destination.

## Short-circuiting “and” expressions

If  $cond = \text{false}$  (branch if  $b_1$  and  $b_2$  is false):

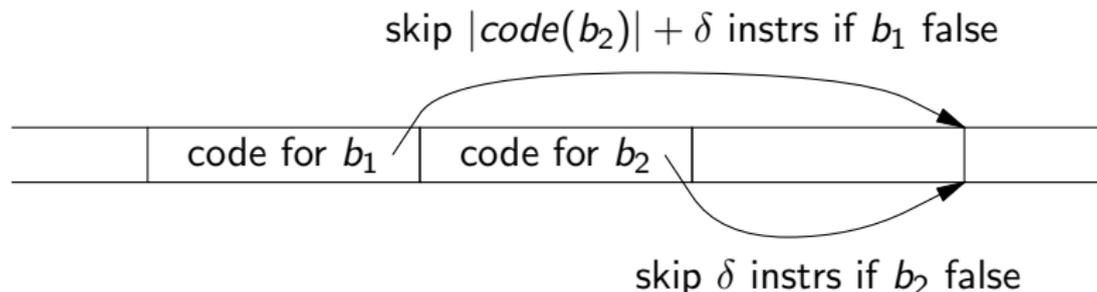


If  $cond = \text{true}$  (branch if  $b_1$  and  $b_2$  is true):

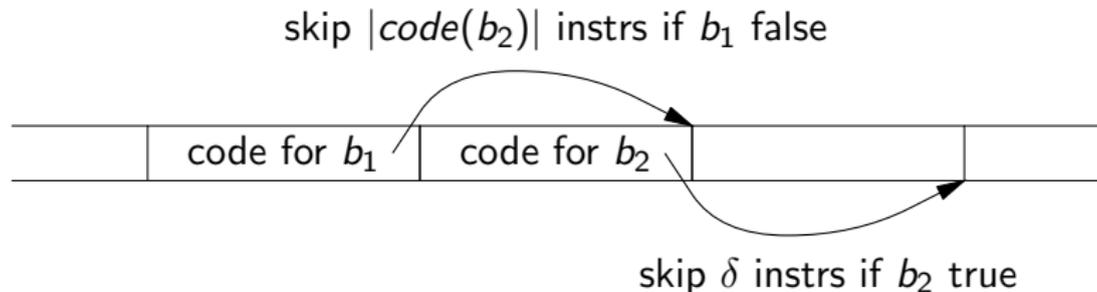

## Compilation of commands


If the command  $c$ , started in initial state  $st$ , terminates in final state  $st'$ ,

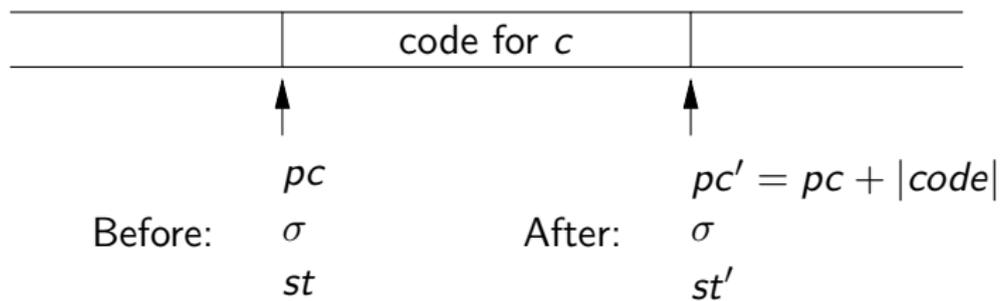

(See function `compile_com` in `Compil.v`)


# The mysterious offsets

Code for IFB  $b$  THEN  $c_1$  ELSE  $c_2$  FI:

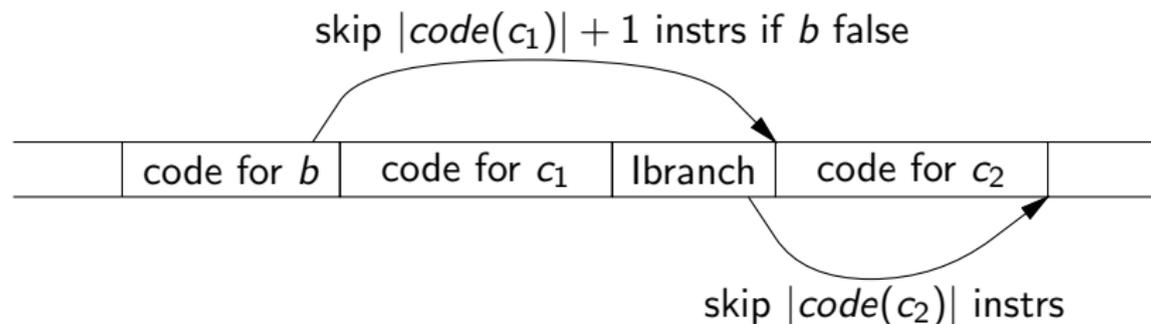

## The mysterious offsets

Code for WHILE  $b$  DO  $c$  END:

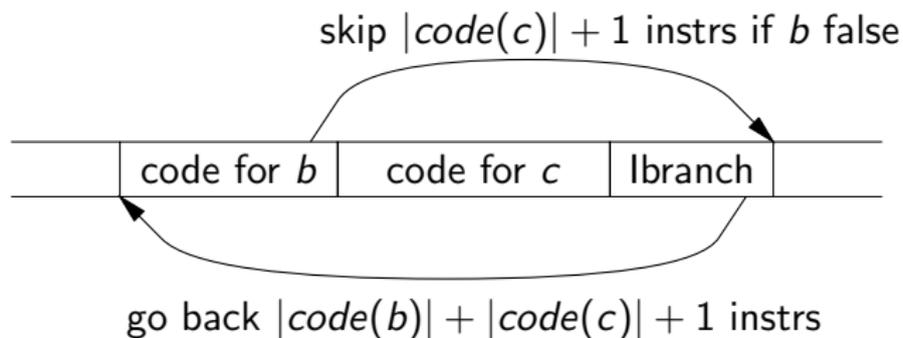

# Compiling IMP to virtual machine code

- 1 Reminder: the IMP language
- 2 The IMP virtual machine
- 3 The compiler
- 4 Verifying the compiler: first results**

# Compiler verification

We now have two ways to run a program:

- Interpret it using e.g. the `eval_step` function defined in `Imp.v`.
- Compile it, then run the generated virtual machine code.

Will we get the same results either way?


## The compiler verification problem

Verify that a compiler is semantics-preserving:  
the generated code behaves as prescribed by the semantics of the source program.

## First verifications

Let's try to formalize and prove the intuitions we had when writing the compilation functions.

Intuition for arithmetic expressions: if  $a$  evaluates to  $n$  in store  $st$ ,

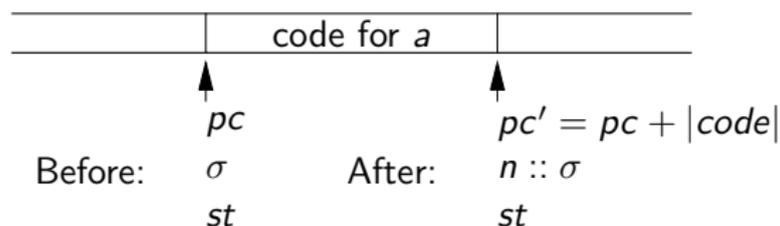

A formal claim along these lines:


```
Lemma compile_aexp_correct:
  forall st a pc stk,
  star (transition (compile_aexp a))
    (0, stk, st)
    (length (compile_aexp a), aeval st a :: stk, st).
```

## Verifying the compilation of expressions

For this statement to be provable by induction over the structure of the expression  $a$ , we need to generalize it so that

- the start PC is not necessarily 0;
- the code `compile_aexp a` appears as a fragment of a larger code  $C$ .

To this end, we define the predicate `codeseq_at C pc C'` capturing the following situation:

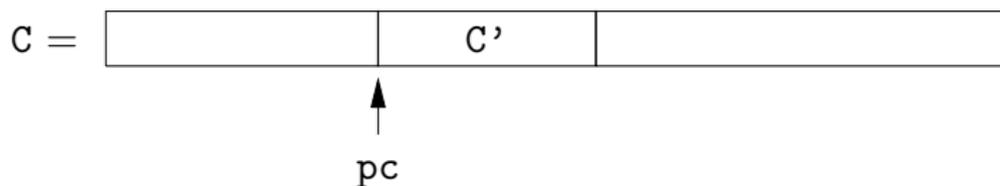

## Verifying the compilation of expressions

Lemma `compile_aexp_correct`:

```
forall C st a pc stk,  
  codeseq_at C pc (compile_aexp a) ->  
  star (transition C)  
    (pc, stk, st)  
    (pc + length (compile_aexp a), aeval st a :: stk, st).
```

Proof: a simple induction on the structure of  $a$ .

The base cases are trivial:

- $a = n$ : a single `Iconst` transition.
- $a = x$ : a single `Ivar( $x$ )` transition.

## An inductive case

Consider  $a = a_1 + a_2$  and assume

$$\text{codeseq\_at } C \text{ } pc \text{ } (\text{code}(a_1) + + \text{code}(a_2) + + \text{Iadd} :: \text{nil})$$

We have the following sequence of transitions:

$$(pc, \sigma, st)$$

$\downarrow$  \* ind. hyp. on  $a_1$

$$(pc + |\text{code}(a_1)|, \text{aeval } st \ a_1 :: \sigma, st)$$

$\downarrow$  \* ind. hyp. on  $a_2$

$$(pc + |\text{code}(a_1)| + |\text{code}(a_2)|, \text{aeval } st \ a_2 :: \text{aeval } st \ a_1 :: \sigma, st)$$

$\downarrow$  Iadd transition

$$(pc + |\text{code}(a_1)| + |\text{code}(a_2)| + 1, (\text{aeval } st \ a_1 + \text{aeval } st \ a_2) :: \sigma, st)$$

## Historical note

As simple as this proof looks, it is of historical importance:

- First published proof of compiler correctness. (McCarthy and Painter, 1967).
- First mechanized proof of compiler correctness. (Milner and Weyrauch, 1972, using Stanford LCF).

John McCarthy  
James Painter<sup>1</sup>

## CORRECTNESS OF A COMPILER FOR ARITHMETIC EXPRESSIONS<sup>2</sup>

**1. Introduction.** This paper contains a proof of the correctness of a simple compiling algorithm for compiling arithmetic expressions into machine language.

The definition of correctness, the formalism used to express the description of source language, object language and compiler, and the methods of proof are all intended to serve as prototypes for the more complicated task of proving the correctness of usable compilers. The ultimate goal, as outlined in references [1], [2], [3] and [4] is to make it possible to use a computer to check proofs that compilers are correct.

*Mathematical Aspects of Computer Science, 1967*

## Proving Compiler Correctness in a Mechanized Logic

---

R. Milner and R. Weyhrauch

Computer Science Department  
Stanford University

### Abstract

We discuss the task of machine-checking the proof of a simple compiling algorithm. The proof-checking program is *LCF*, an implementation of a logic for computable functions due to Dana Scott, in which the abstract syntax and extensional semantics of programming languages can be naturally expressed. The source language in our example is a simple *ALGOL*-like language with assignments, conditionals, whiles and compound statements. The target language is an assembly language for a machine with a pushdown store. Algebraic methods are used to give structure to the proof, which is presented only in outline. However, we present in full the expression-compiling part of the algorithm. More than half of the complete proof has been machine checked, and we anticipate no difficulty with the remainder. We discuss our experience in conducting the proof, which indicates that a large part of it may be automated to reduce the human contribution.

*Machine Intelligence (7)*, 1972.

## APPENDIX 2: command sequence for McCarthy-Painter lemma

```
GOAL  $\forall e, sp, |swfse\ e|: MT(\text{compe } e, sp) \Rightarrow svof(sp) | \{ (MSE(e, svof\ sp)) \&pdof(sp) \},$   
       $\forall e, |swfse\ e|: |swft(\text{compe } e) \Rightarrow TT,$   
       $\forall e, |swfse\ e|: (\text{count}(\text{compe } e) = 0) \Rightarrow TT;$   
TRY 2 INDUCT 56;  
  TRY 1 SIMPL;  
  LABEL INDHYP;  
  TRY 2 ABSTR;  
  TRY 1 CASES  $wfsefun(f, e);$   
  LABEL TT;  
  TRY 1 CASES type  $a = N;$   
  TRY 1 SIMPL BY ,FMT1, ,FMSE, ,FCOMPE, ,FISWFT1, ,FCOUNT;  
  TRY 2; SS-, TT; SIMPL; TT; QED;  
  TRY 3 CASES type  $a = E;$   
  TRY 1 SUBST ,FCOMPE;  
  SS-, TT; SIMPL; TT; USE BOTH3 -, ;SS+, TT;  
  INCL--, 1; ;SS+--, ;INCL--, 2; ;SS+--, ;INCL---, 3; ;SS+--;  
  TRY 1 CONJ;  
  TRY 1 SIMPL;  
  TRY 1 USE COUNT1;  
  TRY 1;  
  APPL ,INDHYP+2, arg1of e;  
  LABEL CARG1;  
  SIMPL-; QED;  
  TRY 2 USE COUNT1;  
  TRY 1;
```

(Even the proof scripts look familiar!)

## Verifying the compilation of expressions

Similar approach for boolean expressions:

Lemma `compile_bexp_correct`:

```
forall C st b cond ofs pc stk,  
  codeseq_at C pc (compile_bexp b cond ofs) ->  
  star (transition C)  
    (pc, stk, st)  
    (pc + length (compile_bexp b cond ofs)  
     + if eqb (beval st b) cond then ofs else 0,  
     stk, st).
```

Proof: induction on the structure of `b`, plus copious case analysis.

## Verifying the compilation of commands

```
Lemma compile_com_correct_terminating:
  forall C st c st',
  c / st || st' ->
  forall stk pc,
  codeseq_at C pc (compile_com c) ->
  star (transition C)
      (pc, stk, st)
      (pc + length (compile_com c), stk, st').
```

An induction on the structure of  $c$  fails because of the `WHILE` case. An induction on the derivation of  $c / st \parallel st'$  works perfectly.

## Summary so far

Piecing the lemmas together, and defining

```
compile_program c = compile_command c ++ Ihalt :: nil
```

we obtain a rather nice theorem:

```
Theorem compile_program_correct_terminating:  
  forall c st st',  
    c / st || st' ->  
    mach_terminates (compile_program c) st st'.
```

But is this enough to conclude that our compiler is correct?

## What could have we missed?

```
Theorem compile_program_correct_terminating:  
  forall c st st',  
    c / st || st' ->  
    mach_terminates (compile_program c) st st'.
```

What if the generated VM code could terminate on a state other than  $st'$ ? or loop? or go wrong?

What if the program  $c$  started in  $st$  diverges instead of terminating?  
What does the generated code do in this case?

Needed: more precise notions of semantic preservation + richer semantics (esp. for non-termination).

# Part III

## Notions of semantic preservation

## Comparing the behaviors of two programs

Consider two programs  $P_1$  and  $P_2$ , possibly in different languages.

(For example,  $P_1$  is an IMP command and  $P_2$  is virtual machine code generated by compiling  $P_1$ .)

The semantics of the two languages associate to  $P_1, P_2$  sets  $\mathcal{B}(P_1), \mathcal{B}(P_2)$  of observable behaviors.

$\text{card}(\mathcal{B}(P)) = 1$  if  $P$  is deterministic, and  $\text{card}(\mathcal{B}(P)) > 1$  if it is not.

## Observable behaviors

For an IMP-like language:

$$\textit{observable behavior} ::= \textit{terminates}(st) \mid \textit{diverges} \mid \textit{goeswrong}$$

(Alternative: in the *terminates* case, observe not the full final state *st* but only the values of specific variables.)

For a functional language like STLC:

$$\textit{observable behavior} ::= \textit{terminates}(v) \mid \textit{diverges} \mid \textit{goeswrong}$$

where *v* is the value of the program.

## Observable behaviors

For an imperative language with I/O: add a **trace** of input-output operations performed during execution.

`x := 1; x := 2;`

$\approx$

`x := 2;`

(trace:  $\epsilon$ )

(trace:  $\epsilon$ )

`print(1); print(2);`

$\not\approx$

`print(2);`

(trace: out(1).out(2))

(trace: out(2))

## Bisimulation (observational equivalence)

$$\mathcal{B}(P_1) = \mathcal{B}(P_2)$$

The source and transformed programs are completely undistinguishable.

Often too strong in practice . . .

## Reducing non-determinism during compilation

Languages such as C leave evaluation order partially unspecified.

```
int x = 0;
int f(void) { x = x + 1; return x; }
int g(void) { x = x - 1; return x; }
```

The expression  $f() + g()$  can evaluate either

- to 1 if  $f()$  is evaluated first (returning 1), then  $g()$  (returning 0);
- to  $-1$  if  $g()$  is evaluated first (returning  $-1$ ), then  $f()$  (returning 0).

Every C compiler chooses one evaluation order at compile-time.

The compiled code therefore has fewer behaviors than the source program (1 instead of 2).

## Reducing non-determinism during optimization

In a concurrent setting, classic optimizations often reduce non-determinism:

Original program:

```
a := x + 1; b := x + 1;      run in parallel with      x := 1;
```

Program after common subexpression elimination:

```
a := x + 1; b := a;        run in parallel with      x := 1;
```

Assuming  $x = 0$  initially, the final states for the original program are

$$(a, b) \in \{(1, 1); (1, 2); (2, 2)\}$$

Those for the optimized program are

$$(a, b) \in \{(1, 1); (2, 2)\}$$

## Backward simulation (refinement)

$$\mathcal{B}(P_1) \supseteq \mathcal{B}(P_2)$$

All possible behaviors of  $P_2$  are legal behaviors of  $P_1$ , but  $P_2$  can have fewer behaviors (e.g. because some behaviors were eliminated during compilation).



## Safe backward simulation

Restrict ourselves to source programs that cannot go wrong:

$$\text{goeswrong} \notin \mathcal{B}(P_1) \implies \mathcal{B}(P_1) \supseteq \mathcal{B}(P_2)$$

Let  $Spec$  be the functional specification of a program:  
a set of correct behaviors, not containing  $goeswrong$ .

A program  $P$  satisfies  $Spec$  iff  $\mathcal{B}(P) \subseteq Spec$ .

### Lemma

*If “safe backward simulation” holds,  
and  $P_1$  satisfies  $Spec$ , then  $P_2$  satisfies  $Spec$ .*


# The pains of backward simulations

“Safe backward simulation” looks like “the” semantic preservation property we expect from a correct compiler.

It is however rather difficult to prove:

- We need to consider all steps that the compiled code can take, and trace them back to steps the source program can take.
- This is problematic if one source-level step is broken into several machine-level steps.  
(E.g.  $x ::= a$  is one step in IMP, but several instructions in the VM.)

## General shape of a backward simulation proof

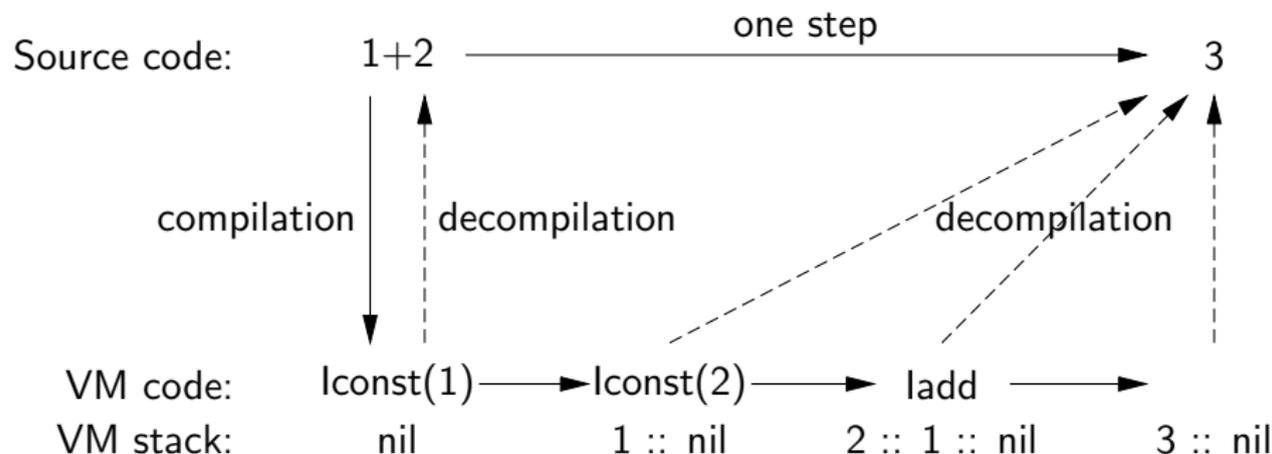

Intermediate VM code sequences like `Iconst(2)`; `Iadd` or just `Iadd` do not correspond to the compilation of any source expression.

One solution: invent a **decompilation** function that is left-inverse of compilation. (Hard in general!)

## Forward simulations

Forward simulation property:

$$\mathcal{B}(P_1) \subseteq \mathcal{B}(P_2)$$

Safe forward simulation property:

$$\text{goeswrong} \notin \mathcal{B}(P_1) \implies \mathcal{B}(P_1) \subseteq \mathcal{B}(P_2)$$

Significantly easier to prove than backward simulations, but not informative enough, apparently:

The compiled code  $P_2$  has all the good behaviors of  $P_1$ , but could have additional bad behaviors . . .

# Determinism to the rescue!


## Lemma

If  $P_2$  is deterministic (i.e.  $\mathcal{B}(P_2)$  is a singleton), then

- “forward simulation” implies “backward simulation”
- “forward simulation for correct programs” implies “backward simulation for correct programs”

Trivial result: follows from  $\emptyset \subset X \subseteq \{y\} \implies X = \{y\}$ .

## Relating preservation properties

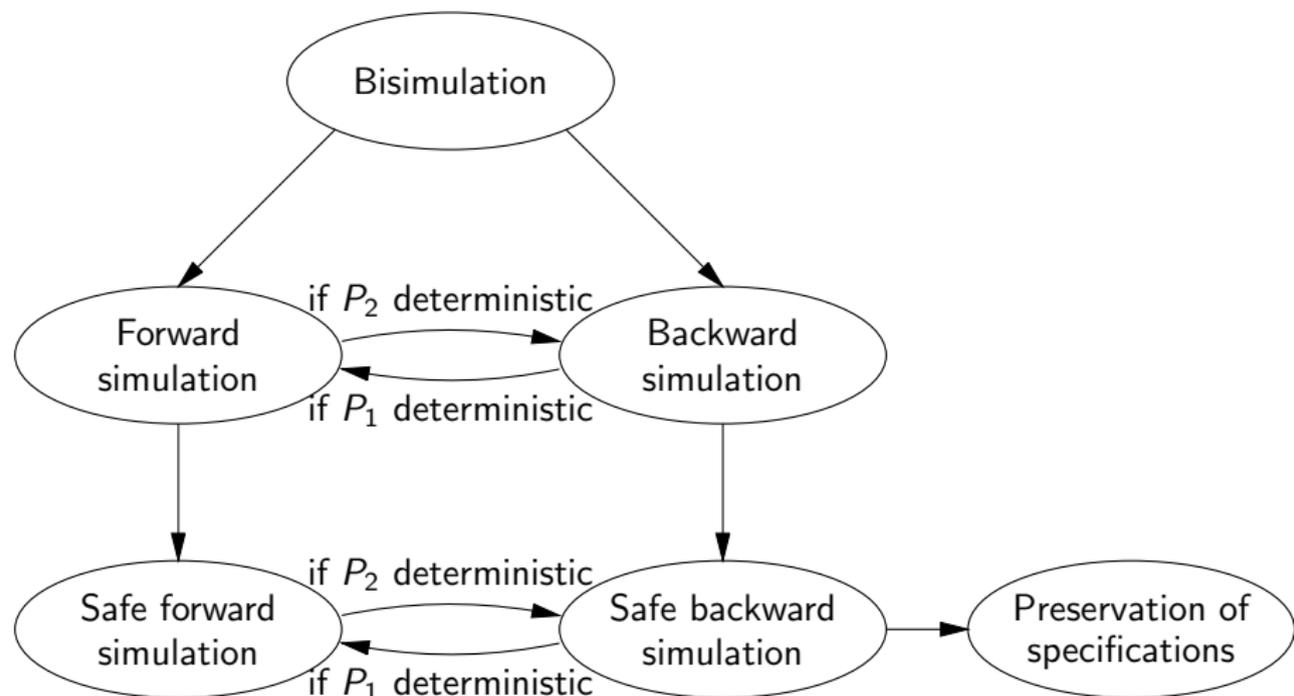

# Our plan for verifying a compiler

- 1 Prove “forward simulation for correct programs” between source and compiled codes.
- 2 Prove that the target language (machine code) is deterministic.
- 3 Conclude that all functional specifications are preserved by compilation.

Note: (1) + (2) imply that the source language has deterministic semantics. If this isn't naturally the case (e.g. for C), start by determinizing its semantics (e.g. fix an evaluation order a priori).

# Handling multiple compilation passes

Source (non-det)


Source (determinized)

Intermediate language 1


Intermediate language 2

Machine code


# Handling multiple compilation passes

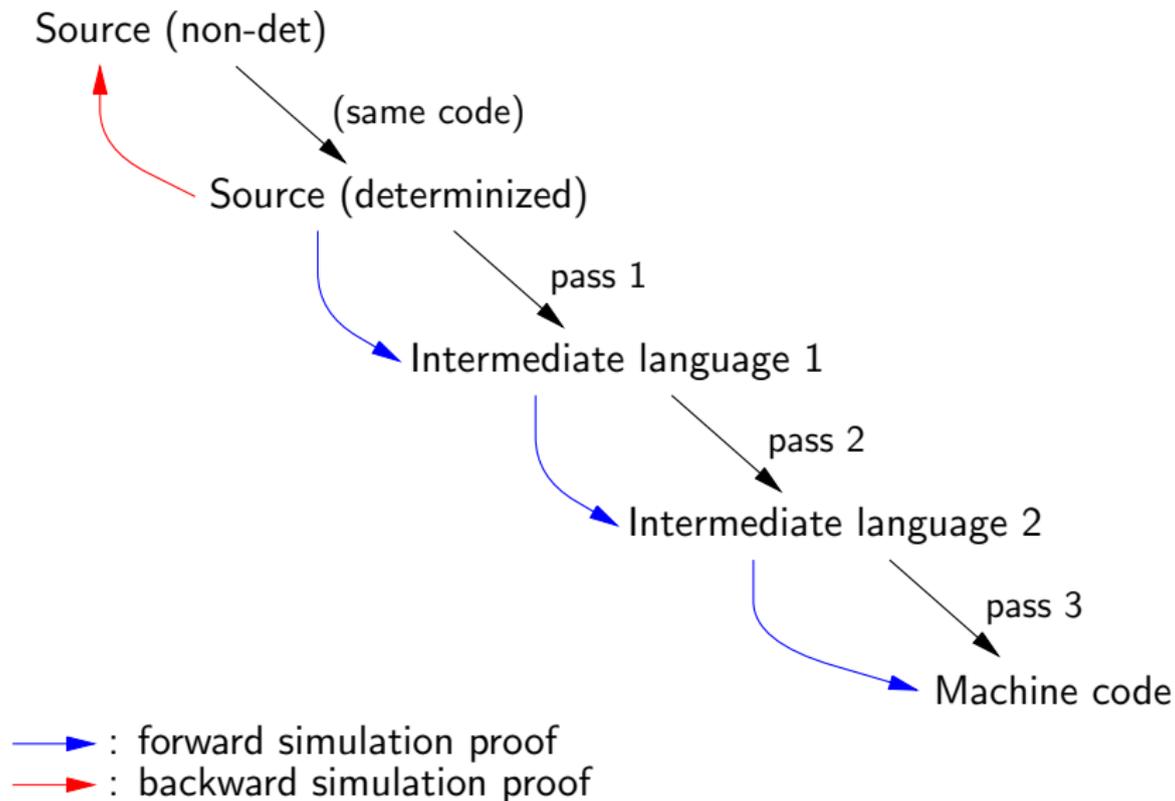


# Handling multiple compilation passes

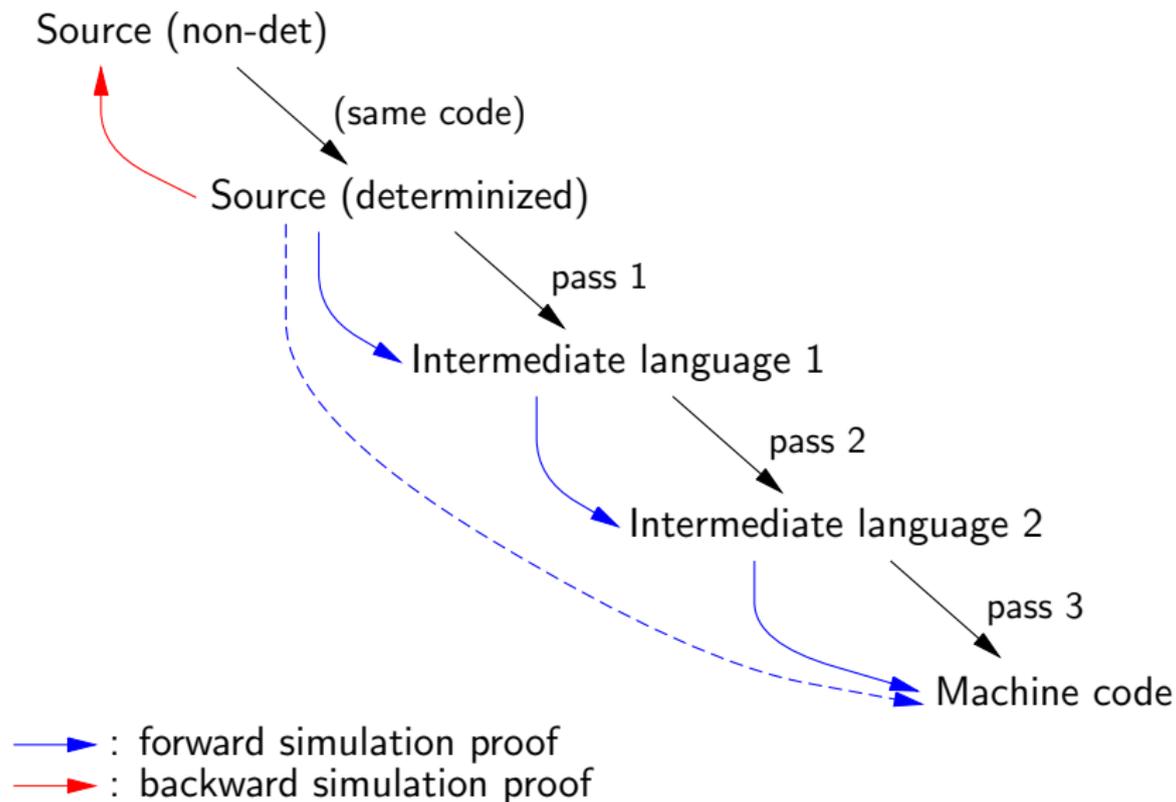

## Handling multiple compilation passes

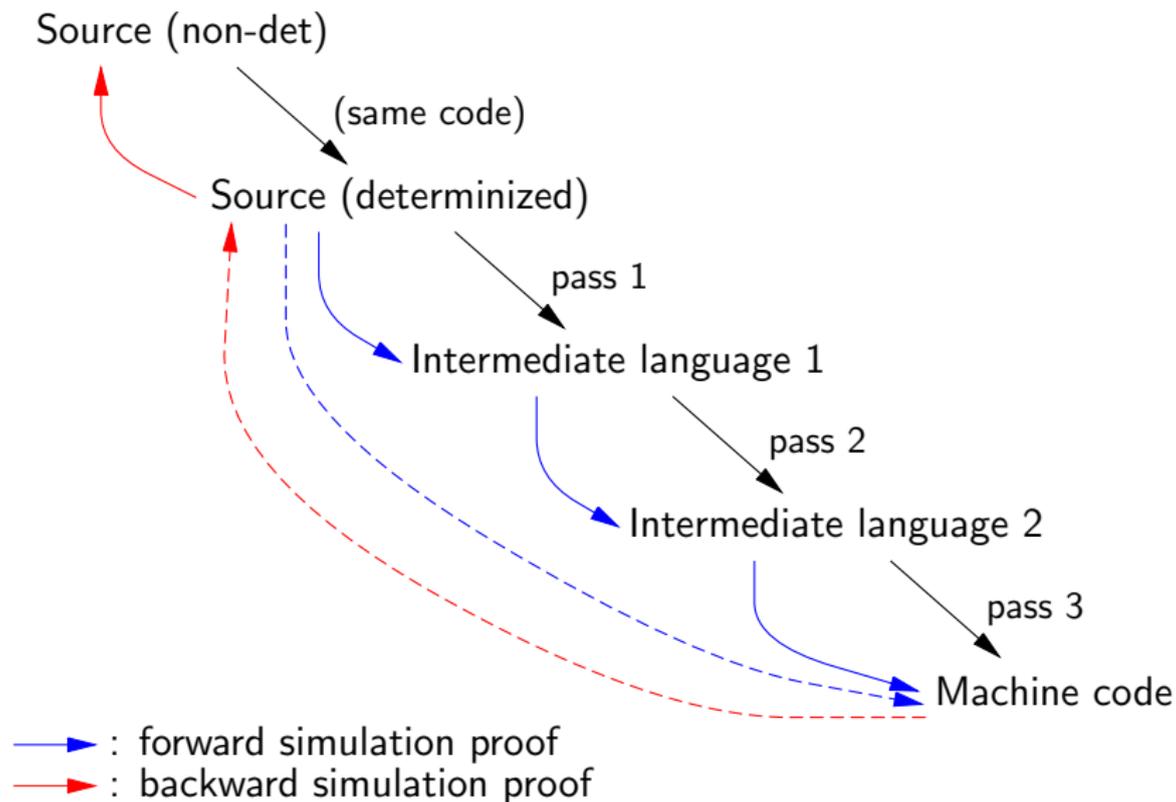

# Handling multiple compilation passes

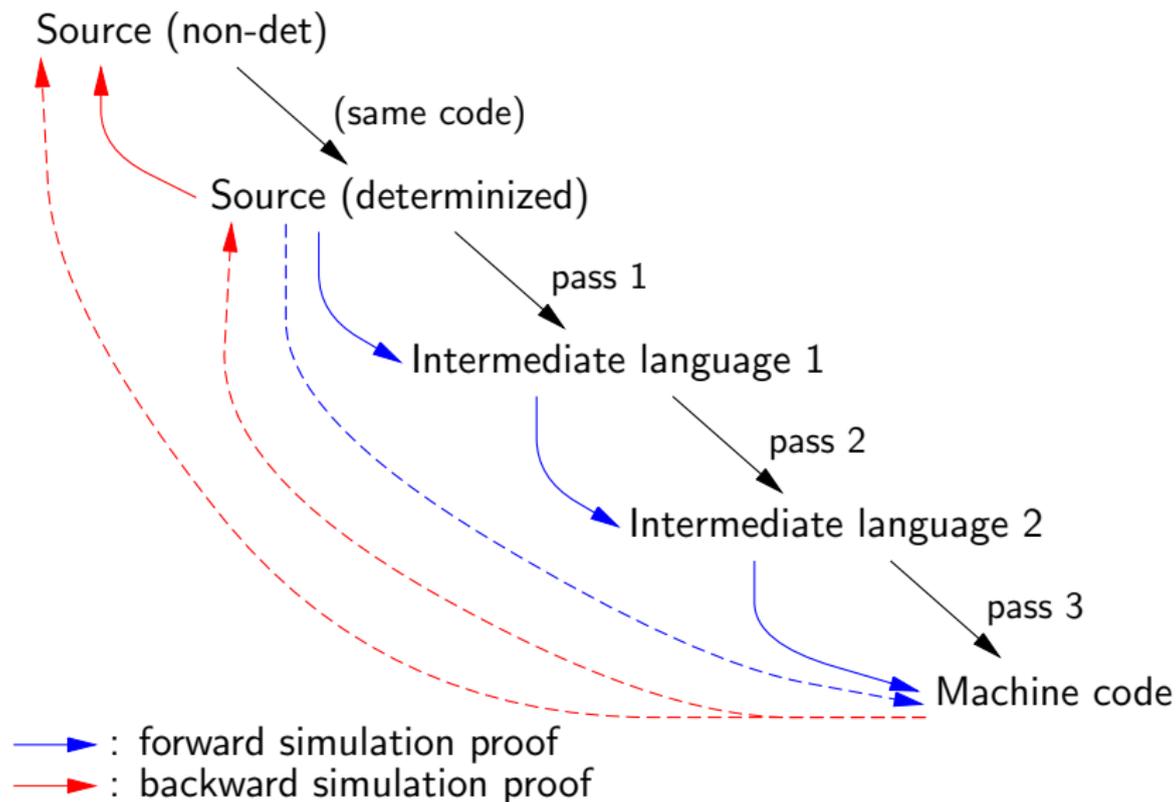

## Back to the IMP $\rightarrow$ VM compiler

We have already proved half of a safe forward simulation result:

```
Theorem compile_program_correct_terminating:  
  forall c st st',  
    c / st || st' ->  
    mach_terminates (compile_program c) st st'.
```

It remains to show the other half:

*If command  $c$  diverges when started in state  $st$ ,  
then the virtual machine, executing code `compile_program c`  
from initial state  $st$ , makes infinitely many transitions.*

What we need: a formal characterization of divergence for IMP commands.

# Part IV

## More on mechanized semantics

# More on mechanized semantics

- 5 Reminder: big-step semantics for terminating programs
- 6 Small-step semantics
- 7 Small-step semantics with continuations

## Big-step semantics

A predicate  $c/s \Rightarrow s'$ , meaning “started in state  $s$ , command  $c$  terminates and the final state is  $s'$ ”.

$$\text{SKIP}/s \Rightarrow s$$

$$x := a/s \Rightarrow s[x \leftarrow \text{aeval } s \ a]$$

$$\frac{c_1/s \Rightarrow s_1 \quad c_2/s_1 \Rightarrow s_2}{c_1; c_2/s \Rightarrow s_2}$$

$$\frac{\begin{array}{l} c_1/s \Rightarrow s' \text{ if } \text{beval } s \ b = \text{true} \\ c_2/s \Rightarrow s' \text{ if } \text{beval } s \ b = \text{false} \end{array}}{\text{IFB } b \text{ THEN } c_1 \text{ ELSE } c_2 \text{ FI}/s \Rightarrow s'}$$

$$c_1; c_2/s \Rightarrow s_2$$

$$\text{IFB } b \text{ THEN } c_1 \text{ ELSE } c_2 \text{ FI}/s \Rightarrow s'$$

$$\frac{\text{beval } s \ b = \text{false}}{\text{WHILE } b \text{ DO } c \text{ END}/s \Rightarrow s}$$

$$\text{WHILE } b \text{ DO } c \text{ END}/s \Rightarrow s$$

$$\frac{\text{beval } s \ b = \text{true} \quad c/s \Rightarrow s_1 \quad \text{WHILE } b \text{ DO } c \text{ END}/s_1 \Rightarrow s_2}{\text{WHILE } b \text{ DO } c \text{ END}/s \Rightarrow s_2}$$

$$\text{WHILE } b \text{ DO } c \text{ END}/s \Rightarrow s_2$$

# Pros and cons of big-step semantics

## Pros:

- Follows naturally the structure of programs. (Gilles Kahn called it “natural semantics”).
- Close connection with interpreters.
- Powerful induction principle (on the structure of derivations).
- Easy to extend with various structured constructs (functions and procedures, other forms of loops)

## Cons:

- Fails to characterize diverging executions. (More precisely: no distinction between divergence and going wrong.)
- Concurrency, unstructured control (goto) nearly impossible to handle.

## Big-step semantics and divergence

For IMP, a **negative** characterization of divergence:

$$c/s \text{ diverges} \iff \neg(\exists s', c/s \Rightarrow s')$$

In general (e.g. STLC), executions can also go wrong (in addition to terminating or diverging). Big-step semantics fails to distinguish between divergence and going wrong:

$$c/s \text{ diverges} \vee c/s \text{ goes wrong} \iff \neg(\exists s', c/s \Rightarrow s')$$

Highly desirable: a **positive** characterization of divergence, distinguishing it from “going wrong”.

# More on mechanized semantics

- 5 Reminder: big-step semantics for terminating programs
- 6 Small-step semantics
- 7 Small-step semantics with continuations

## Small-step semantics

Also called “structured operational semantics”.

Like  $\beta$ -reduction in the  $\lambda$ -calculus: view computations as sequences of reductions

$$M \xrightarrow{\beta} M_1 \xrightarrow{\beta} M_2 \xrightarrow{\beta} \dots$$

Each reduction  $M \rightarrow M'$  represents an elementary computation.  
 $M'$  represents the residual computations that remain to be done later.

## Small-step semantics for IMP

Reduction relation:  $c/s \rightarrow c'/s'$ .

$$x := a/s \rightarrow \text{SKIP}/s[x \leftarrow \text{aeval } s \ a]$$

$$\frac{c_1/s \rightarrow c'_1/s'}{(c_1; c_2)/s \rightarrow (c'_1; c_2)/s'} \qquad (\text{SKIP}; c)/s \rightarrow c/s$$

$$\frac{\text{beval } s \ b = \text{true}}{\text{IFB } b \ \text{THEN } c_1 \ \text{ELSE } c_2 \ \text{FI}/s \rightarrow c_1/s}$$

$$\frac{\text{beval } s \ b = \text{false}}{\text{IFB } b \ \text{THEN } c_1 \ \text{ELSE } c_2 \ \text{FI}/s \rightarrow c_2/s}$$

$$\text{WHILE } b \ \text{DO } c \ \text{END}/s \rightarrow \text{IFB } b \ \text{THEN } c; \ \text{WHILE } b \ \text{DO } c \ \text{END} \ \text{ELSE } \text{SKIP}/s$$

## Sequences of reductions

The behavior of a command  $c$  in an initial state  $s$  is obtained by forming sequences of reductions starting at  $c/s$ :

- Termination with final state  $s'$ : finite sequence of reductions to SKIP.

$$c/s \rightarrow \cdots \rightarrow \text{SKIP}/s'$$

- Divergence: infinite sequence of reductions.

$$c/s \rightarrow c_1/s_1 \rightarrow \cdots \rightarrow c_n/s_n \rightarrow \cdots$$

- Going wrong: finite sequence of reductions to an irreducible command that is not SKIP.

$$(c, s) \rightarrow \cdots \rightarrow (c', s') \not\rightarrow \text{ with } c \neq \text{SKIP}$$

## Equivalence small-step / big-step

A classic result:

$$c/s \Rightarrow s' \iff c/s \xrightarrow{*} \text{SKIP}/s'$$

(See Coq file `Semantics.v`.)

# Pros and cons of small-step semantics

## Pros:

- Clean, unquestionable characterization of program behaviors (termination, divergence, going wrong).
- Extends even to unstructured constructs (goto, concurrency).
- De facto standard in the type systems community and in the concurrency community.

## Cons:

- Does not follow the structure of programs; lack of a powerful induction principle.
- Syntax often needs to be extended with intermediate forms arising only during reductions.
- “Spontaneous generation” of terms.

## Reasoning with or without structure

Reasoning, big-step style: by pre- and post-conditions

- Single program: if  $c/s \Rightarrow s'$  and  $P\ s$ , then  $Q\ s'$ .
- Program transformation: if  $c/s \Rightarrow s'$  and  $T\ c\ c_1$  and  $P\ s\ s_1$ , there exists  $s'_1$  s.t.  $c_1/s_1 \Rightarrow s'_1$  and  $Q\ s'\ s'_1$ .

Proofs: by induction on a derivation of  $c/s \Rightarrow s'$ .

Reasoning, small-step style: by invariants and simulations.

- Single program: if  $c/s \rightarrow c'/s'$  and  $I(c, s)$  then  $I(c', s')$ .
- Program transformation: a relation  $I(c, s) (c_1, s_1)$  is a (bi)-simulation for the transitions of the two programs.

Proofs: by case analysis on each transition.

## Intermediate forms extending the syntax

Many programming constructs require unnatural extensions of the syntax of terms so that we can give reduction rules for these constructs.

**Example:** the break statement (as in C, Java, ...).

Commands:  $c ::= \dots \mid \text{BREAK} \mid \text{INLOOP } c_1 \ c_2$

Intuition:  $\text{INLOOP } c_1 \ c_2 \approx c_1; c_2$  but with special treatment of BREAK arising out of  $c_1$ .

$\text{WHILE } b \ \text{DO } c \ \text{END}/s \rightarrow \text{IFB } b \ \text{THEN } \text{INLOOP } c \ (\text{WHILE } b \ \text{DO } c \ \text{END})\text{ELSE SKIP}/s$

$(\text{BREAK}; c)/s \rightarrow \text{BREAK}/s$

$(\text{INLOOP SKIP } c)/s \rightarrow c/s$

$(\text{INLOOP BREAK } c)/s \rightarrow \text{SKIP}/s$


$c_1/s \rightarrow c'_1/s'$

$\text{INLOOP } c_1 \ c_2/s \rightarrow \text{INLOOP } c'_1 \ c_2/s'$


## Spontaneous generation of terms

$$(\text{IFB } b \text{ THEN } c_1 \text{ ELSE } c_2 \text{ FI}; c)/s \rightarrow (c_1; c)/s$$

Compiled code for initial command:

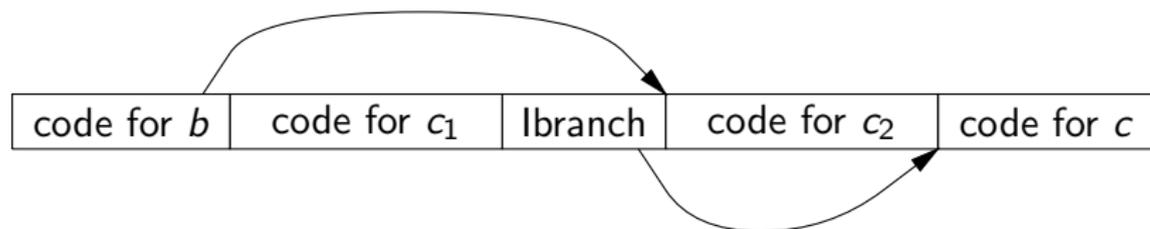

This code nowhere contains the compiled code for  $c_1; c$ , which is:



(Similar problem for

$\text{WHILE } b \text{ DO } c \text{ END}/s \rightarrow \text{IFB } b \text{ THEN } c; \text{ WHILE } b \text{ DO } c \text{ END ELSE SKIP}/s.)$

# More on mechanized semantics

- 5 Reminder: big-step semantics for terminating programs
- 6 Small-step semantics
- 7 Small-step semantics with continuations

## Small-step semantics with continuations

A variant of standard small-step semantics that addresses issues #2 (no extensions of the syntax of commands) and #3 (no spontaneous generation of commands).

Idea: instead of rewriting whole commands:

$$c/s \rightarrow c'/s'$$


rewrite pairs of (subcommand under focus, remainder of command):

$$c/k/s \rightarrow c'/k'/s'$$

(Vaguely related to focusing in proof theory.)

## Standard small-step semantics

Rewrite whole commands, even though only a sub-command (the redex) changes.

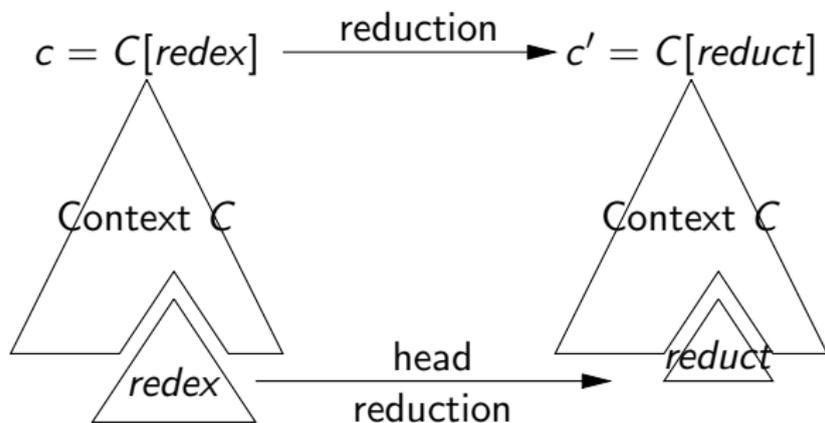

## Focusing the small-step semantics

Rewrite pairs (subcommand, context in which it occurs).

$$x ::= a, \begin{array}{c} \triangle \\ | \end{array} \rightarrow \text{SKIP}, \begin{array}{c} \triangle \\ | \end{array}$$

The sub-command is not always the redex: add explicit **focusing** and **resumption** rules to move nodes between subcommand and context.

$$(c_1; c_2), \begin{array}{c} \triangle \\ | \end{array} \rightarrow c_1, \begin{array}{c} \triangle \\ | \\ /; c_2 \end{array}$$

Focusing on the left of a sequence

$$\text{SKIP}, \begin{array}{c} \triangle \\ | \\ /; c_2 \end{array} \rightarrow c_2, \begin{array}{c} \triangle \\ | \end{array}$$

Resuming a sequence



## Representing contexts “upside-down”

Inductive ctx :=

- | CThole: ctx
- | CTseq: com -> ctx -> ctx.

Inductive cont :=

- | Kstop: cont
- | Kseq: com -> cont -> cont.

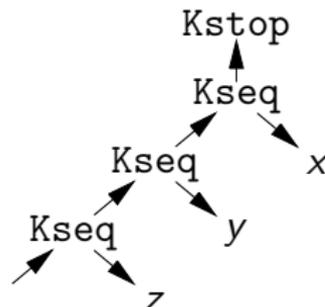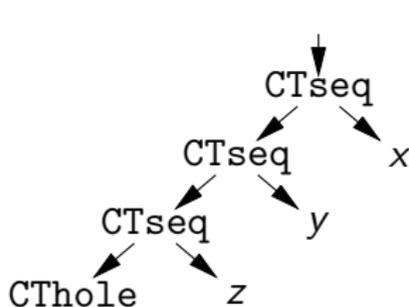

CTseq (CTseq (CTseq CThole z) y) x

Kseq z (Kseq y (Kseq x Kstop))

Upside-down context  $\approx$  continuation.

(“Eventually, do z, then do y, then do x, then stop.”)

## Transition rules

$$x := a/k/s \rightarrow \text{SKIP}/k/s[x \leftarrow \text{aeval } s \ a]$$
$$(c_1; c_2)/k/s \rightarrow c_1/\text{Kseq } c_1 \ k/s$$
$$\text{IFB } b \ \text{THEN } c_1 \ \text{ELSE } c_2/k/s \rightarrow c_1/k/s \quad \text{if beval } s \ b = \text{true}$$
$$\text{IFB } b \ \text{THEN } c_1 \ \text{ELSE } c_2/k/s \rightarrow c_2/k/s \quad \text{if beval } s \ b = \text{false}$$
$$\begin{aligned} \text{WHILE } b \ \text{DO } c \ \text{END}/k/s &\rightarrow c/\text{Kseq } (\text{WHILE } b \ \text{DO } c \ \text{END}) \ k/s \\ &\quad \text{if beval } s \ b = \text{true} \end{aligned}$$
$$\text{WHILE } b \ \text{DO } c \ \text{END}/k/s \rightarrow \text{SKIP}/c/k \quad \text{if beval } s \ b = \text{false}$$
$$\text{SKIP}/\text{Kseq } c \ k/s \rightarrow c/k/s$$

Note: no spontaneous generation of fresh commands.

## Enriching the language

Let's add a `break` statement. We need a new form of continuations for loops, but no ad-hoc extension to the syntax of commands.

Commands:  $c ::= \dots \mid \text{BREAK}$

Continuations:  $k ::= \text{Kstop} \mid \text{Kseq } c \ k \mid \text{Kwhile } b \ c \ k$

New or modified rules:

$$\text{WHILE } b \text{ DO } c \text{ END}/k/s \rightarrow c/\text{Kwhile } b \ c \ k/s$$

if beval  $s \ b = \text{true}$

$$\text{SKIP}/\text{Kwhile } b \ c \ k/s \rightarrow \text{WHILE } b \text{ DO } c \text{ END}/k/s$$
$$\text{BREAK}/\text{Kseq } c \ k/s \rightarrow \text{BREAK}/k/s$$
$$\text{BREAK}/\text{Kwhile } b \ c \ k/s \rightarrow \text{SKIP}/k/s$$

(Exercise: what about `continue`?)

## Equivalence with the other semantics

$$c/Kstop/s \xrightarrow{*} SKIP/Kstop/s' \iff c/s \Rightarrow s' \iff c/s \xrightarrow{*} SKIP/s'$$
$$c/k/s \rightarrow \infty \iff c/s \rightarrow \infty$$

(See Coq file `Semantics.v`)

# Part V

## Compiling IMP to virtual machine code, continued

## Finishing the proof of forward simulation

One half already proved: the terminating case.

```
Theorem compile_program_correct_terminating:  
  forall c st st',  
    c / st ==> st' ->  
    mach_terminates (compile_program c) st st'.
```

One half to go: the diverging case.

(If  $c/st$  diverges, then  $\text{mach\_diverges (compile\_program } c) \text{ st.}$ )


## Forward simulations, small-step style

Show that every transition in the execution of the source program

- is simulated by some transitions in the compiled program
- while preserving a relation between the states of the two programs.

## Lock-step simulation

Every transition of the source is simulated by exactly one transition in the compiled code.

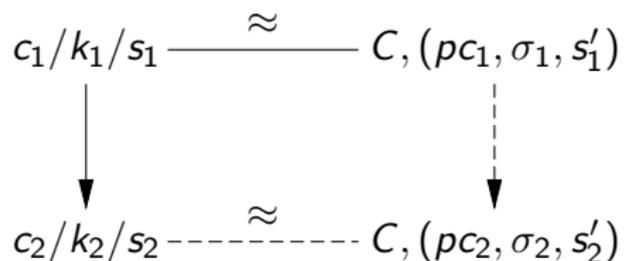

## Lock-step simulation

Further show that initial states are related:


$$c/Kstop/s \approx (C, (0, nil, s)) \text{ with } C = \text{compile\_program}(c)$$

Further show that final states are quasi-related:

$$SKIP/Kstop/s \approx (C, mst) \implies (C, mst) \xrightarrow{*} (C, (pc, nil, s)) \wedge C(pc) = \text{Ihalt}$$

# Lock-step simulation

Forward simulation follows easily:

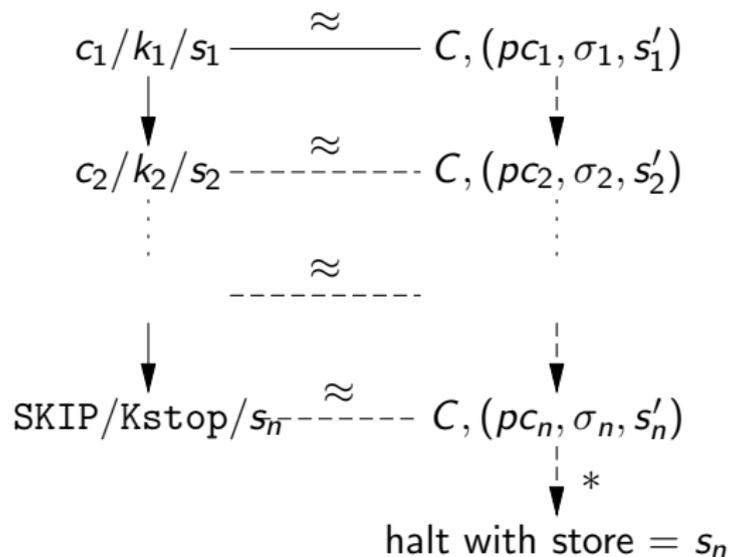


(Likewise if  $c_1/k_1/s_1$  reduces infinitely.)

## “Plus” simulation diagrams

In some cases, each transition in the source program is simulated by **one or several** transitions in the compiled code.

(Example: compiled code for  $x ::= a$  consists of several instructions.)

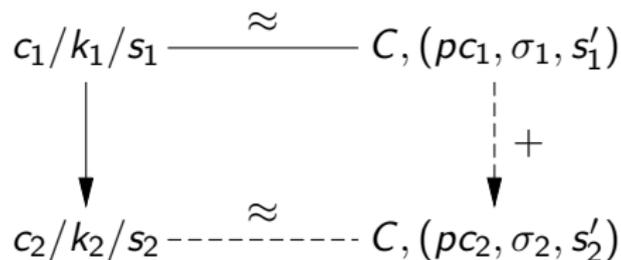


Forward simulation still holds.

## “Star” simulation diagrams (incorrect)


In other cases, each transition in the source program is simulated by **zero, one or several** transitions in the compiled code.

(Example: source reduction  $(\text{SKIP}; c)/s \rightarrow c/s$  makes zero transitions in the machine code.)

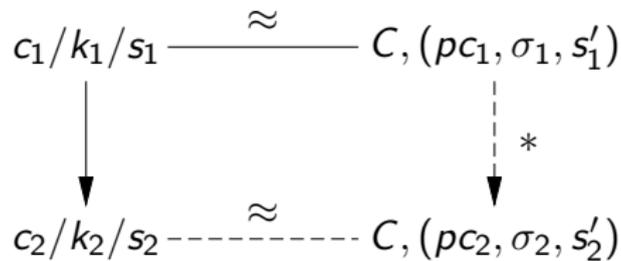

Forward simulation is not guaranteed:  
terminating executions are preserved;  
but diverging executions may not be preserved.

## The “infinite stuttering” problem

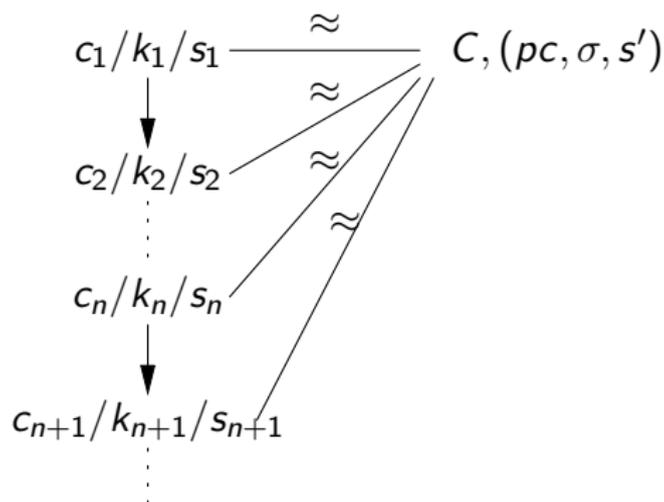

The source program diverges but the compiled code can terminate, normally or by going wrong.


## An incorrect optimization that exhibits infinite stuttering

Add special cases to `compile_com` so that the following trivially infinite loop gets compiled to no instructions at all:

```
compile_com (WHILE true DO SKIP END) = nil
```

# Infinite stuttering


Adding special cases to the  $\approx$  relation, we can prove the following naive “star” simulation diagram:

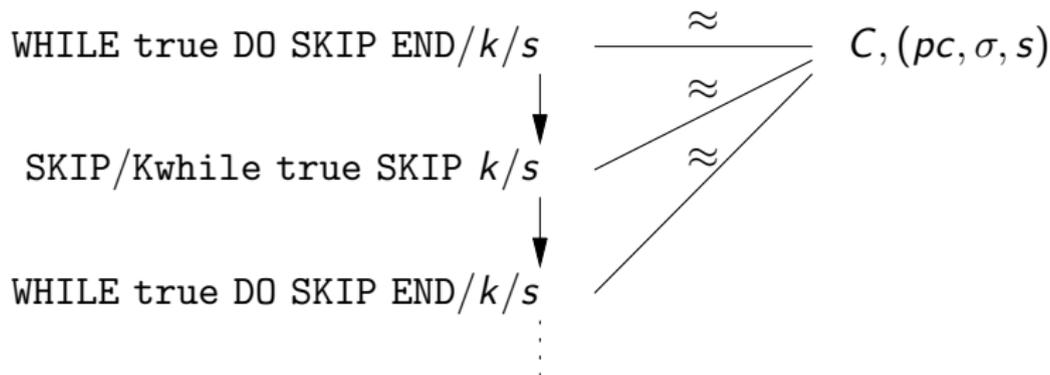

Conclusion: a naive “star” simulation diagram does not prove that a compiler is correct.

## “Star” simulation diagrams (corrected)

Find a **measure**  $M(c) : \text{nat}$  over source terms that decreases strictly when a stuttering step is taken. Then show:

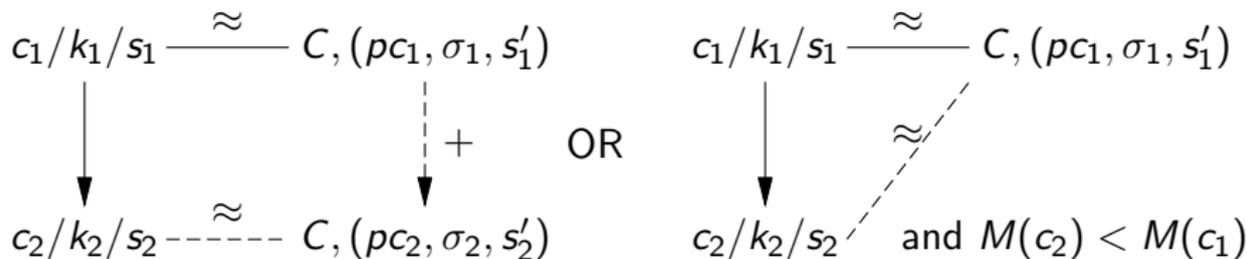

Forward simulation, terminating case: OK (as before).

Forward simulation, diverging case: OK.

(If  $c/s$  diverges, it must perform infinitely many non-stuttering steps, so the machine executes infinitely many transitions.)

## Application to the IMP $\rightarrow$ VM compiler

Let's try to prove a “star” simulation diagram for our compiler.

Two difficulties:

- 1 Rule out infinite stuttering.
- 2 Match the current command-continuation  $c, k$  (which changes during reductions) with the compiled code  $C$  (which is fixed throughout execution).

## Anti-stuttering measure

Stuttering reduction = no machine instruction executed. These include:

$$(c_1; c_2)/k/s \rightarrow c_1/Kseq\ c_2\ k/s$$

$$SKIP/Kseq\ c\ k/s \rightarrow c/k/s$$

$$(IFB\ true\ THEN\ c_1\ ELSE\ c_2)/k/s \rightarrow c_1/k/s$$

$$(WHILE\ true\ DO\ c\ END)/k/s \rightarrow c/Kwhile\ true\ c\ k/s$$

No measure  $M$  on the command  $c$  can rule out stuttering: for  $M$  to decrease in the second case above, we should have

$$M(SKIP) > M(c) \quad \text{for all command } c$$

→ We must measure  $(c, k)$  pairs.

## Anti-stuttering measure

After some trial and error, an appropriate measure is:

$$M(c, k) = \text{size}(c) + \sum_{c' \text{ appears in } k} \text{size}(c')$$

(In other words, every constructor of `com` counts for 1, and every constructor of `cont` counts for 0.)

$$M((c_1; c_2), k) = M(c_1, \text{Kseq } c_2 \ k) + 1$$


$$M(\text{SKIP}, \text{Kseq } c \ k) = M(c, k) + 1$$

$$M(\text{IFB } b \ \text{THEN } c_1 \ \text{ELSE } c_2 \ \text{FI}, k) \geq M(c_1, k) + 1$$


$$M(\text{WHILE } b \ \text{DO } c \ \text{END}, k) = M(c, \text{Kwhile } b \ c \ k) + 1$$

## Relating commands and continuations with compiled code

In the big-step proof: `codeseq_at C pc (compile_com c)`.

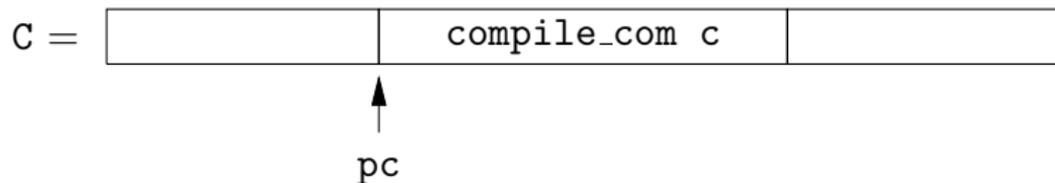


In a proof based on the small-step continuation semantics: we must also relate continuations  $k$  with the compiled code:

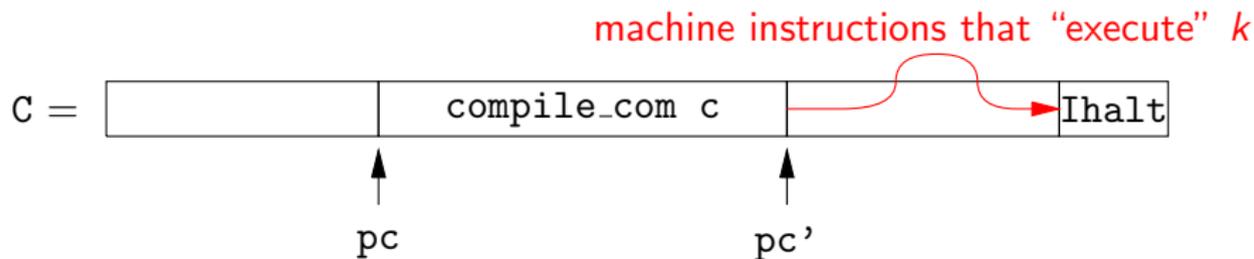


## Relating continuations with compiled code

A predicate `compile_cont C k pc`, meaning “there exists a code path in  $C$  from  $pc$  to a `Ihalt` instruction that executes the pending computations described by  $k$ ”.

Base case  $k = Kstop$ :

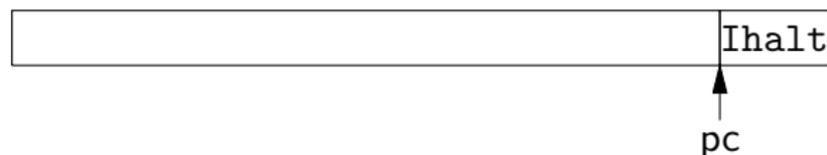


Sequence case  $k = Kseq\ c\ k'$ :

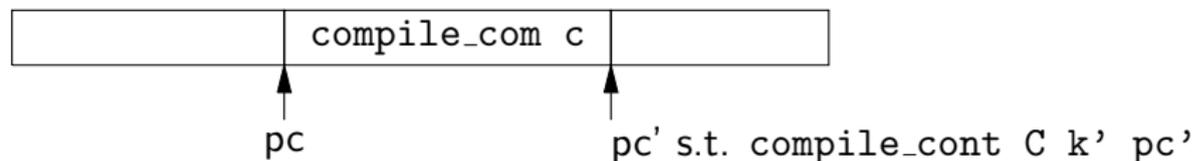


## Relating continuations with compiled code

A “non-structural” case allowing us to insert branches at will:

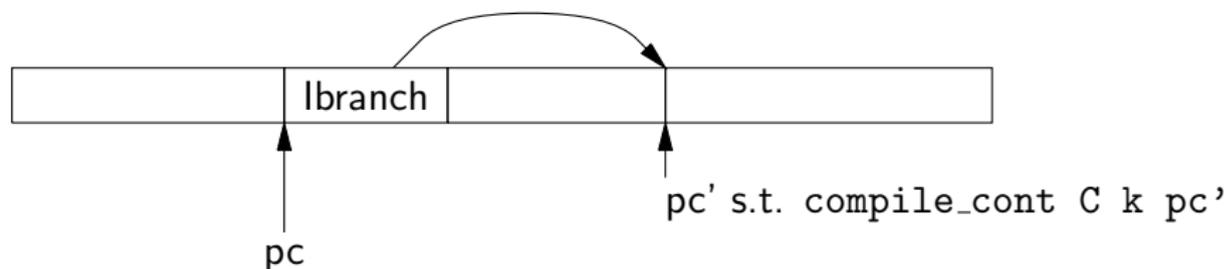

Useful to handle continuations arising out of IFB  $b$  THEN  $c_1$  ELSE  $c_2$ :

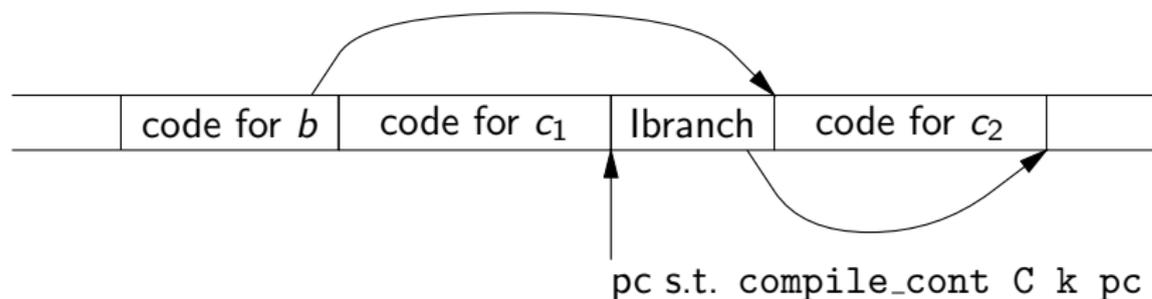


## The simulation invariant

A source-level configuration  $(c, k, s)$  is related to a machine configuration  $C, (pc, \sigma, s')$  iff:

- the memory states are identical:  $s' = s$
- the stack is empty:  $\sigma = \epsilon$
- $C$  contains the compiled code for command  $c$  starting at  $pc$
- $C$  contains compiled code matching continuation  $k$  starting at  $pc + |\text{code}(c)|$ .

## The simulation diagram

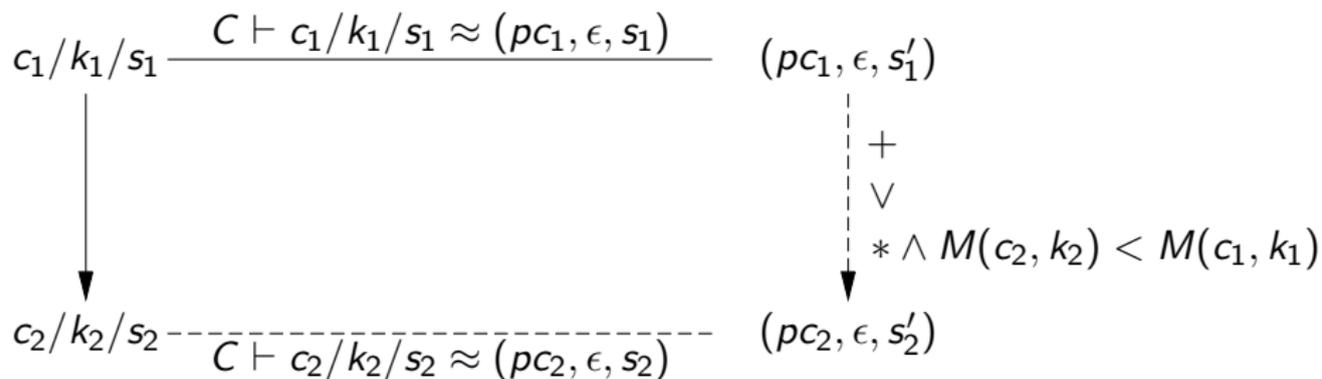

Proof: by case analysis on the source transition on the left.

## Wrapping up

As a corollary of this simulation diagram, we obtain both:

- An alternate proof of compiler correctness for terminating programs:  
if  $c/Kstop/s \xrightarrow{*} SKIP/Kstop/s'$   
then `mach_terminates (compile_program c) s s'`
- A proof of compiler correctness for diverging programs:  
if  $c/Kstop/s$  reduces infinitely,  
then `mach_diverges (compile_program c) s`

Mission complete!

# Part VI

## Optimizations based on liveness analysis

# Compiler optimizations

Automatically transform the programmer-supplied code into equivalent code that

- **Runs faster**
  - ▶ Removes redundant or useless computations.
  - ▶ Use cheaper computations (e.g.  $x * 5 \rightarrow (x \ll 2) + x$ )
  - ▶ Exhibits more parallelism (instruction-level, thread-level).
- **Is smaller**  
(For cheap embedded systems.)
- **Consumes less energy**  
(For battery-powered systems.)
- **Is more resistant to attacks**  
(For smart cards and other secure systems.)

Dozens of compiler optimizations are known, each targeting a particular class of inefficiencies.

# Compiler optimization and static analysis

Some optimizations are unconditionally valid, e.g.:

$$x * 2 \rightarrow x + x$$

$$x * 4 \rightarrow x \ll 2$$

Most others apply only if some conditions are met:

$$x / 4 \rightarrow x \gg 2 \quad \text{only if } x \geq 0$$

$$x + 1 \rightarrow 1 \quad \text{only if } x = 0$$

$$\text{if } x < y \text{ then } c_1 \text{ else } c_2 \rightarrow c_1 \quad \text{only if } x < y$$

$$x := y + 1 \rightarrow \text{skip} \quad \text{only if } x \text{ unused later}$$

→ need a **static analysis** prior to the actual code transformation.

# Static analysis

Determine some properties of all concrete executions of a program.

Often, these are properties of the values of variables at a given program point:

$$x = n \quad x \in [n, m] \quad x = \text{expr} \quad a.x + b.y \leq n$$

Requirements:

- The inputs to the program are unknown.
- The analysis must terminate.
- The analysis must run in reasonable time and space.

## Running example: dead code elimination via liveness analysis

Remove assignments  $x := e$ , turning them into `skip`, whenever the variable  $x$  is never used later in the program execution.

### Example

Consider:  $x := 1; \quad y := y + 1; \quad x := 2$

The assignment  $x := 1$  can always be eliminated since  $x$  is not used before being redefined by  $x := 2$ .

Builds on a static analysis called **liveness analysis**.

# Optimizations based on liveness analysis

- 8 Liveness analysis
- 9 Dead code elimination
- 10 Advanced topic: register allocation


## Notions of liveness

A variable is **dead** at a program point if its value is not used later in any execution of the program:

- either the variable is not mentioned again before going out of scope
- or it is always redefined before further use.


A variable is **live** if it is not dead.

Easy to compute for straight-line programs (sequences of assignments):

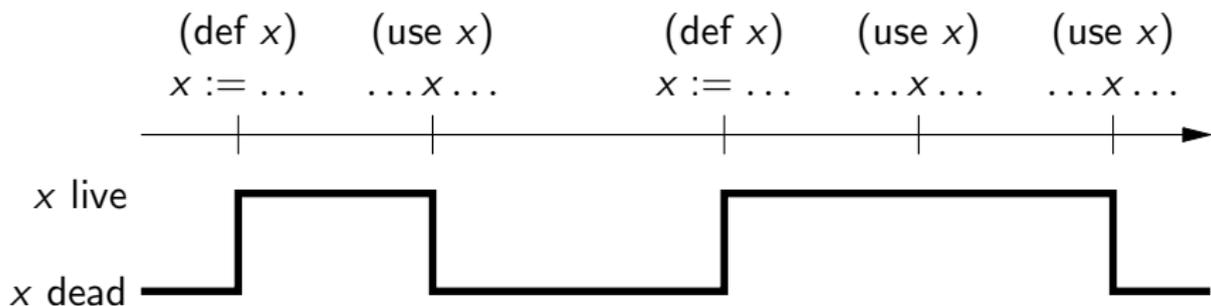

## Notions of liveness

Liveness information is more delicate to compute in the presence of conditionals and loops:

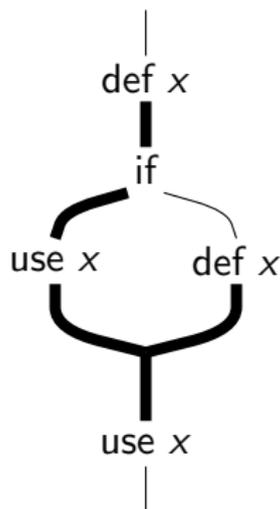

Conservatively over-approximate liveness, assuming all `if` conditionals can be true or false, and all `while` loops are taken 0 or several times.

## Liveness equations

Given a set  $L$  of variables live “after” a command  $c$ , write  $\text{live}(c, L)$  for the set of variables live “before” the command.

$$\text{live}(\text{SKIP}, L) = L$$


$$\text{live}(x := a, L) = \begin{cases} (L \setminus \{x\}) \cup FV(a) & \text{if } x \in L; \\ L & \text{if } x \notin L. \end{cases}$$

$$\text{live}((c_1; c_2), L) = \text{live}(c_1, \text{live}(c_2, L))$$

$$\text{live}((\text{IFB } b \text{ THEN } c_1 \text{ ELSE } c_2), L) = FV(b) \cup \text{live}(c_1, L) \cup \text{live}(c_2, L)$$

$$\begin{aligned} \text{live}((\text{WHILE } b \text{ DO } c \text{ END}), L) &= X \text{ such that} \\ &X \supseteq L \cup FV(b) \cup \text{live}(c, X) \end{aligned}$$

## Liveness for loops

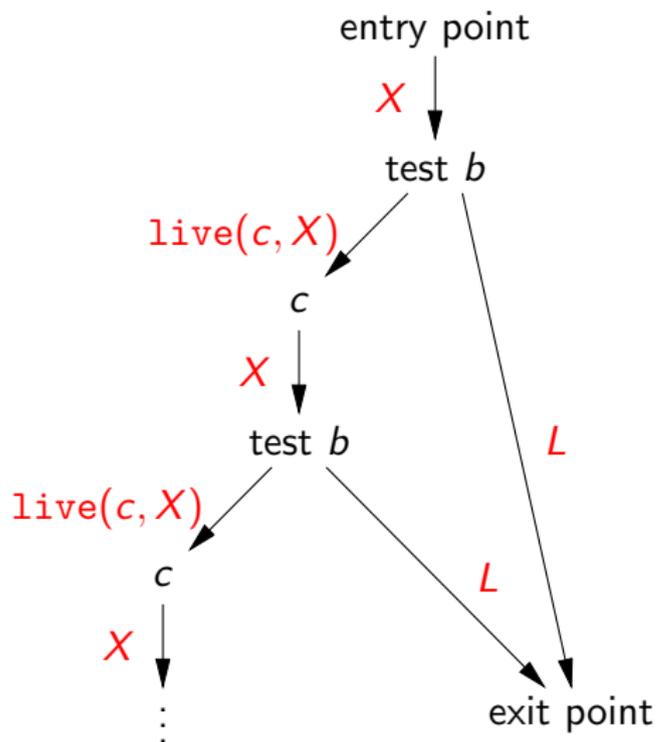

We must have:

- $FV(b) \subseteq X$   
(evaluation of  $b$ )
- $L \subseteq X$   
(if  $b$  is false)
- $\text{live}(c, X) \subseteq X$   
(if  $b$  is true and  $c$  is executed)

## Fixpoints, a.k.a “the recurring problem”

Consider  $F = \lambda X. L \cup FV(b) \cup \text{live}(c, X)$ .

To analyze `while` loops, we need to compute a **post-fixpoint** of  $F$ , i.e. an  $X$  such that  $F(X) \subseteq X$ .

For maximal precision,  $X$  would preferably be the smallest fixpoint  $F(X) = X$ ; but for soundness, any post-fixpoint suffices.

# The mathematician's approach to fixpoints

Let  $A, \leq$  be a partially ordered type. Consider  $F : A \rightarrow A$ .

## Theorem (Knaster-Tarski)

*The sequence*

$$\perp, F(\perp), F(F(\perp)), \dots, F^n(\perp), \dots$$

*converges to the smallest fixpoint of  $F$ , provided that*

- *$F$  is increasing:  $x \leq y \Rightarrow F(x) \leq F(y)$ .*
- *$\perp$  is a smallest element.*
- *All strictly ascending chains  $x_0 < x_1 < \dots < x_n$  are finite.*

This provides an effective way to compute fixpoints.  
(See Coq file `Fixpoint.v`).

# Problems with Knaster-Tarski

- 1 Formalizing and exploiting the ascending chain property  
→ well-founded orderings and Noetherian induction.
- 2 In our case (liveness analysis), the ordering  $\subset$  has infinite ascending chains:  $\emptyset \subset \{x_1\} \subset \{x_1, x_2\} \subset \dots$   
Need to restrict ourselves to subsets of a given, finite universe of variables (= all variables free in the program).  
→ dependent types.

Time for plan B...

## The engineer's approach to post-fixpoints

$$F = \lambda X. L \cup FV(b) \cup \text{live}(c, X)$$

- Compute  $F(\emptyset), F(F(\emptyset)), \dots, F^N(\emptyset)$  up to some fixed  $N$ .
- Stop as soon as a post-fixpoint is found ( $F^{i+1}(\emptyset) \subseteq F^i(\emptyset)$ ).
- Otherwise, return a safe over-approximation (in our case,  $a \cup FV(\text{while } b \text{ do } c \text{ done})$ ).

A compromise between analysis time and analysis precision.

(Coq implementation: see file `Deadcode.v`)

# Optimizations based on liveness analysis

8 Liveness analysis

9 Dead code elimination

10 Advanced topic: register allocation

## Dead code elimination

The program transformation eliminates assignments to dead variables:

$x := a$  becomes SKIP if  $x$  is not live “after” the assignment

Presented as a function  $dce : com \rightarrow VS.t \rightarrow com$   
taking the set of variables live “after” as second parameter  
and maintaining it during its traversal of the command.

(Implementation & examples in file `Deadcode.v`)

# The semantic meaning of liveness

What does it mean, **semantically**, for a variable  $x$  to be **live** at some program point?

Hmmm...

## The semantic meaning of liveness

What does it mean, **semantically**, for a variable  $x$  to be **live** at some program point?

Hmmm...

What does it mean, **semantically**, for a variable  $x$  to be **dead** at some program point?

That its precise value has no impact on the rest of the program execution!

## Liveness as an information flow property

Consider two executions of the same command  $c$  in different initial states:

$$c/s_1 \Rightarrow s_2$$

$$c/s'_1 \Rightarrow s'_2$$

Assume that the initial states **agree** on the variables  $\text{live}(c, L)$  that are live “before”  $c$ :

$$\forall x \in \text{live}(c, L), \quad s_1(x) = s'_1(x)$$

Then, the two executions terminate on final states that agree on the variables  $L$  live “after”  $c$ :

$$\forall x \in L, \quad s_2(x) = s'_2(x)$$

The proof of semantic preservation for dead-code elimination follows this pattern, relating executions of  $c$  and  $\text{dce } c \ L$  instead.

## Agreement and its properties

Definition agree (L: VS.t) (s1 s2: state) : Prop :=  
forall x, VS.In x L -> s1 x = s2 x.

Agreement is monotonic w.r.t. the set of variables L:

Lemma agree\_mon:  
forall L L' s1 s2,  
agree L' s1 s2 -> VS.Subset L L' -> agree L s1 s2.

Expressions evaluate identically in states that agree on their free variables:

Lemma aeval\_agree:  
forall L s1 s2, agree L s1 s2 ->  
forall a, VS.Subset (fv\_aexp a) L -> aeval s1 a = aeval s2 a.

Lemma beval\_agree:  
forall L s1 s2, agree L s1 s2 ->  
forall b, VS.Subset (fv\_bexp b) L -> beval s1 b = beval s2 b.

## Agreement and its properties

Agreement is preserved by **parallel** assignment to a variable:

Lemma `agree_update_live`:

```
forall s1 s2 L x v,  
agree (VS.remove x L) s1 s2 ->  
agree L (update s1 x v) (update s2 x v).
```

Agreement is also preserved by **unilateral** assignment to a variable that is dead “after”:

Lemma `agree_update_dead`:

```
forall s1 s2 L x v,  
agree L s1 s2 -> ~VS.In x L ->  
agree L (update s1 x v) s2.
```

## Forward simulation for dead code elimination

For terminating source programs:

Theorem `dce_correct_terminating`:


`forall st c st', c / st || st' ->`

`forall L st1,`

`agree (live c L) st st1 ->`


`exists st1', dce c L / st1 || st1' /\ agree L st' st1'.`

(Proof: an induction on the derivation of `c / st ==> st'`.)

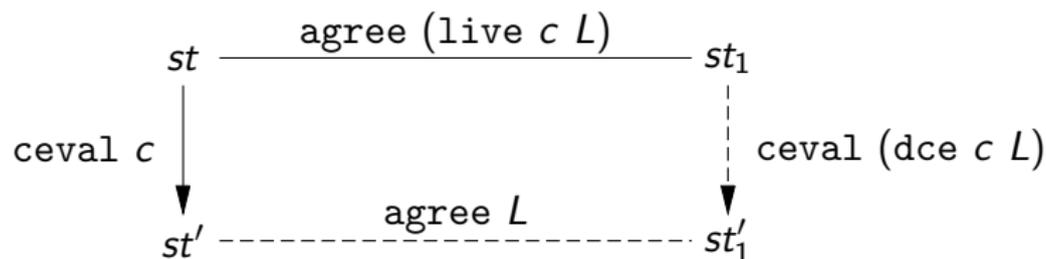

## Forward simulation for dead code elimination

Exercise: extend the result to diverging programs by proving a simulation diagram for the transitions of the small-step semantics of IMP (no need for continuations):

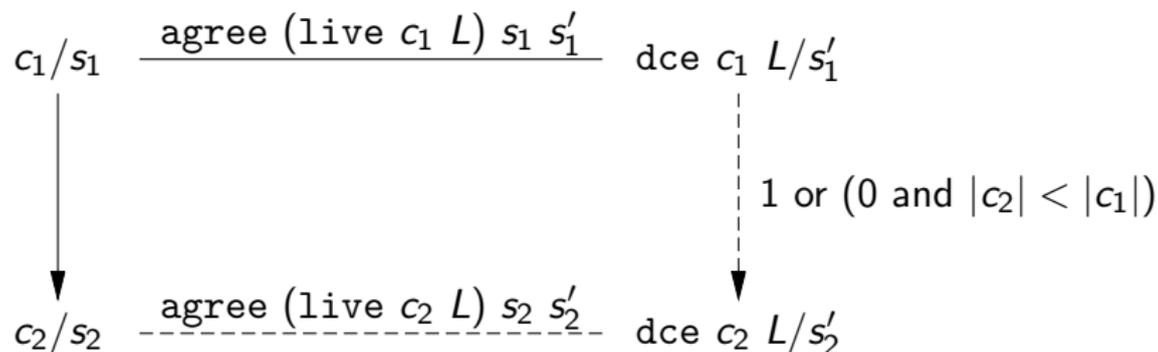

# Optimizations based on liveness analysis

8 Liveness analysis

9 Dead code elimination

10 Advanced topic: register allocation

# The register allocation problem

Place the variables used by the program (in unbounded number) into:

- either **hardware registers**  
(very fast access, but available in small quantity)
- or **memory locations** (generally allocated on the stack)  
(available in unbounded quantity, but slower access)

Try to maximize the use of hardware registers.

A crucial step for the generation of efficient machine code.

# Approaches to register allocation


**Naive approach** (injective allocation):

- Assign the  $N$  most used variables to the  $N$  available registers.
- Assign the remaining variables to memory locations.

**Optimized approach** (non-injective allocation):

- Notice that two variables can share a register as long as they are not simultaneously live.

## Example of register sharing

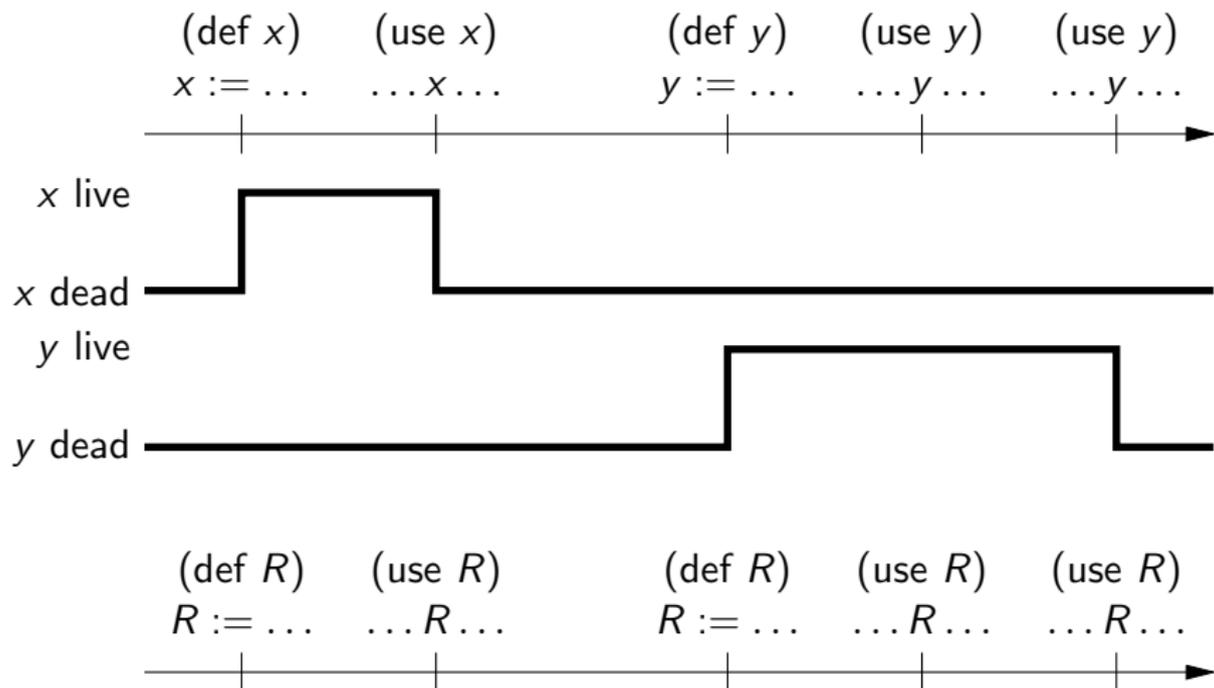

# Register allocation for IMP

Properly done:

- 1 Break complex expressions by introducing temporaries.  
(E.g.  $x = (a + b) * y$  becomes  $tmp = a + b$ ;  $x = tmp * y$ .)
- 2 Translate IMP to a variant  $IMP'$  that uses registers  $\cup$  memory locations instead of variables.

Simplified as follows in this lecture:

- 1 Do not break expressions.
- 2 Translate from IMP to IMP, by renaming identifiers.  
(Convention: low-numbered identifiers  $\approx$  hardware registers.)

# The program transformation

Assume given a “register assignment”  $f : \text{id} \rightarrow \text{id}$ .

The program transformation consists of:

- Renaming variables: all occurrences of  $x$  become  $f x$ .
- Dead code elimination:

$$x ::= a \longrightarrow \text{SKIP} \quad \text{if } x \text{ is dead “after”}$$

- Coalescing:

$$x ::= y \longrightarrow \text{SKIP} \quad \text{if } f x = f y$$

## Correctness conditions on the register assignment

Clearly, not all register assignments  $f$  preserve semantics.

Example: assume  $f\ x = f\ y = f\ z = R$

$x ::= 1;$		$R ::= 1;$
$y ::= 2;$	----->	$R ::= 2;$
$z ::= x + y;$		$R ::= R + R;$

Computes 4 instead of 3 ...

What are sufficient conditions over  $f$ ? Let's discover them by reworking the proof of dead code elimination.

## Agreement, revisited

```
Definition agree (L: VS.t) (s1 s2: state) : Prop :=  
  forall x, VS.In x L -> s1 x = s2 (f x).
```

An expression and its renaming evaluate identically in states that agree on their free variables:

Lemma aeval\_agree:

```
  forall L s1 s2, agree L s1 s2 ->  
  forall a, VS.Subset (fv_aexp a) L ->  
  aeval s1 a = aeval s2 (rename_aexp a).
```

Lemma beval\_agree:

```
  forall L s1 s2, agree L s1 s2 ->  
  forall b, VS.Subset (fv_bexp b) L ->  
  beval s1 b = beval s2 (rename_bexp b).
```

## Agreement, revisited

As before, agreement is monotonic w.r.t. the set of variables L:

Lemma agree\_mon:

```
forall L L' s1 s2,  
  agree L' s1 s2 -> VS.Subset L L' -> agree L s1 s2.
```

As before, agreement is preserved by **unilateral** assignment to a variable that is dead “after”:

Lemma agree\_update\_dead:

```
forall s1 s2 L x v,  
  agree L s1 s2 -> ~VS.In x L ->  
  agree L (update s1 x v) s2.
```

## Agreement, revisited

Agreement is preserved by **parallel** assignment to a variable  $x$  and its renaming  $f x$ , but only if  $f$  satisfies a **non-interference condition** (in red below):

Lemma agree\_update\_live:

```
forall s1 s2 L x v,  
agree (VS.remove x L) s1 s2 ->  
(forall z, VS.In z L -> z <> x -> f z <> f x) ->  
agree L (update s1 x v) (update s2 (f x) v).
```

Counter-example: assume  $f x = f y = R$ .

agree  $\{y\}$   $(x = 0, y = 0)$   $(R = 0)$  holds, but

agree  $\{x; y\}$   $(x = 1, y = 0)$   $(R = 1)$  does not.

## A special case for moves

Consider a variable-to-variable copy  $x ::= y$ .

In this case, the value  $v$  assigned to  $x$  is not arbitrary, but known to be  $s1\ y$ . We can, therefore, weaken the non-interference criterion:

Lemma `agree_update_move`:

```
forall s1 s2 L x y,  
agree (VS.union (VS.remove x L) (VS.singleton y)) s1 s2 ->  
(forall z, VS.In z L -> z <> x -> z <> y -> f z <> f x) ->  
agree L (update s1 x (s1 y)) (update s2 (f x) (s2 (f y))).
```

This makes it possible to assign  $x$  and  $y$  to the same location, even if  $x$  and  $y$  are simultaneously live.

# The interference graph

The various non-interference constraints  $f x \neq f y$  can be represented as an **interference graph**:


- Nodes = program variables.
- Undirected edge between  $x$  and  $y =$   
 $x$  and  $y$  cannot be assigned the same location.

Chaitin's algorithm to construct this graph:

- For each move  $x ::= y$ , add edges between  $x$  and every variable  $z$  live “after” except  $x$  and  $y$ .
- For each other assignment  $x ::= a$ , add edges between  $x$  and every variable  $z$  live “after” except  $x$ .

## Example of an interference graph

```
r := a;  
q := 0;  
WHILE b <= r DO  
  r := r - b;  
  q := q + 1  
END
```

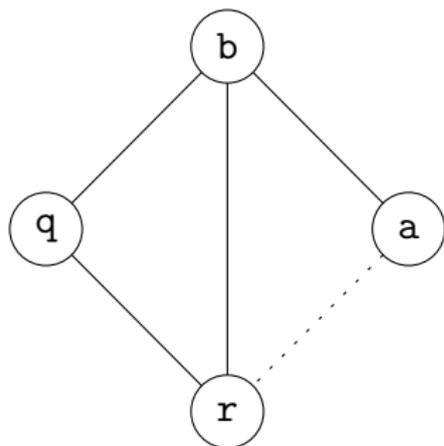

(Full edge = interference; dotted edge = preference.)

# Register allocation as a graph coloring problem

(G. Chaitin, 1981; P. Briggs, 1987)

Color the interference graph, assigning a register or memory location to every node;


under the constraint that the two ends of an interference edge have different colors;

with the objective to


- minimize the number (or total weight) of nodes that are colored by a memory location
- maximize the number of preference edges whose ends have the same color.

(A NP-complete problem in general, but good linear-time heuristics exist.)

## Example of coloring

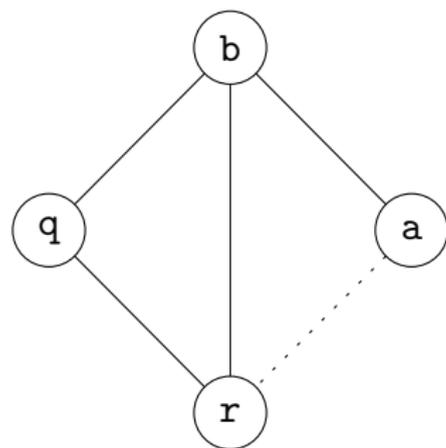

## Example of coloring

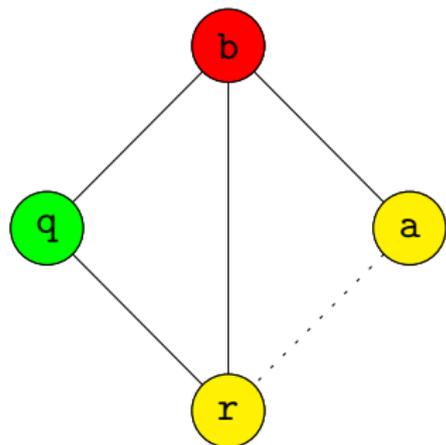

```
yellow := yellow;  
green := 0;  
WHILE red <= yellow DO  
  yellow := yellow - red;  
  green := green + 1  
END
```

# What needs to be proved in Coq?

## Full compiler proof:

formalize and prove correct a good graph coloring heuristic.


George and Appel's *Iterated Register Coalescing*  $\approx$  6 000 lines of Coq.

## Validation a posteriori:


invoke an external, unproven oracle to compute a candidate allocation;  
check that it satisfies the non-interference conditions;  
abort compilation if the checker says false.

# The verified transformation–verified validation spectrum


## Verified transformation

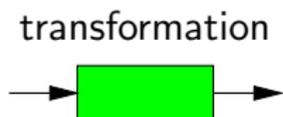

## Verified translation validation

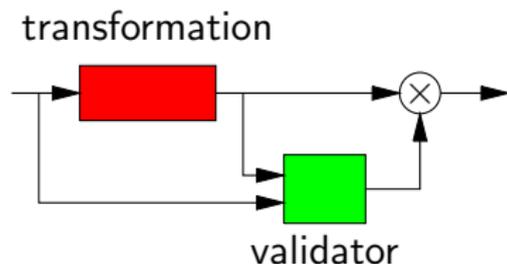

## External solver with verified validation

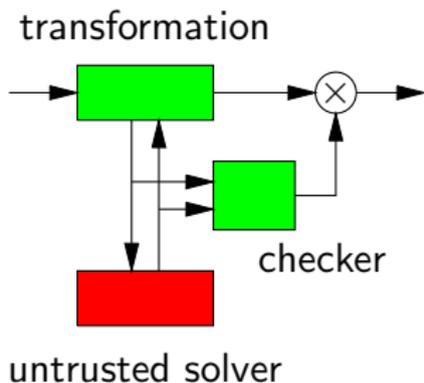

 = formally verified

 = not verified

## Validating candidate allocations in Coq

It is easy to write a Coq boolean-valued function

```
correct_allocation: (id -> id) -> com -> VS.t -> bool
```

that returns true only if the expected non-interference properties are satisfied.

(See file `Regalloc.v`.)

## Semantic preservation

The proofs of forward simulation that we did for dead code elimination then extend easily, under the assumption that `correct_allocation` returns true:

Theorem `transf_correct_terminating`:

`forall st c st', c / st || st' ->`

`forall L st1, agree (live c L) st st1 ->`

`correct_allocation c L = true ->`

`exists st1', transf_com c L / st1 || st1' / agree L st' st1'.`

# Part VII

## A generic static analyzer

# A generic static analyzer

- 11 Introduction to static analysis
- 12 Static analysis as an abstract interpretation
- 13 An abstract interpreter in Coq
- 14 Improving the generic static analyzer

# Static analysis in a nutshell

Statically infer properties of a program that are true of all executions.

*At this program point,  $0 < x \leq y$  and pointer  $p$  is not NULL.*

Emphasis on **infer**: no programmer intervention required.  
(E.g. no need to annotate the source with loop invariants.)

Emphasis on **statically**:

- Inputs to the program are unknown.
- Analysis must always terminate.
- Analysis must run in reasonable time and space.

# Examples of properties that can be statically inferred

## Properties of the value of a single variable: (value analysis)

$x = n$	constant propagation
$x > 0$ or $x = 0$ or $x < 0$	signs
$x \in [n_1, n_2]$	intervals
$x = n_1 \pmod{n_2}$	congruences
$\text{valid}(p[n_1 \dots n_2])$	pointer validity
$p \text{ pointsTo } x$ or $p \neq q$	(non-) aliasing of pointers

( $n, n_1, n_2$  are constants determined by the analysis.)

# Examples of properties that can be statically inferred

## Properties of several variables: (relational analysis)

$$\sum a_i x_i \leq c \quad \text{polyhedras}$$

$$\pm x_1 \pm \dots \pm x_n \leq c \quad \text{octagons}$$

$$\text{expr}_1 = \text{expr}_2 \quad \text{Herbrand equivalences, a.k.a. value numbering}$$

( $a_i, c$  are rational constants determined by the analysis.)

## “Non-functional” properties:

- Memory consumption.
- Worst-case execution time (WCET).

## Using static analysis for optimization

Applying algebraic laws when their conditions are met:

$x / 4 \rightarrow x \gg 2$  if analysis says  $x \geq 0$

$x + 1 \rightarrow 1$  if analysis says  $x = 0$

Optimizing array and pointer accesses:

$a[i]=1; a[j]=2; x=a[i]; \rightarrow a[i]=1; a[j]=2; x=1;$   
if analysis says  $i \neq j$

$*p = a; x = *q; \rightarrow x = *q; *p = a;$   
if analysis says  $p \neq q$

Automatic parallelization:

$loop_1; loop_2 \rightarrow loop_1 \parallel loop_2$  if  $polyh(loop_1) \cap polyh(loop_2) = \emptyset$

# Using static analysis for verification


(Also known as “static debugging”)

Use the results of static analysis to prove the absence of run-time errors:

$$b \in [n_1, n_2] \wedge 0 \notin [n_1, n_2] \implies a/b \text{ cannot fail}$$

$$\text{valid}(p[n_1 \dots n_2]) \wedge i \in [n_1, n_2] \implies *(p + i) \text{ cannot fail}$$

Signal an **alarm** otherwise.

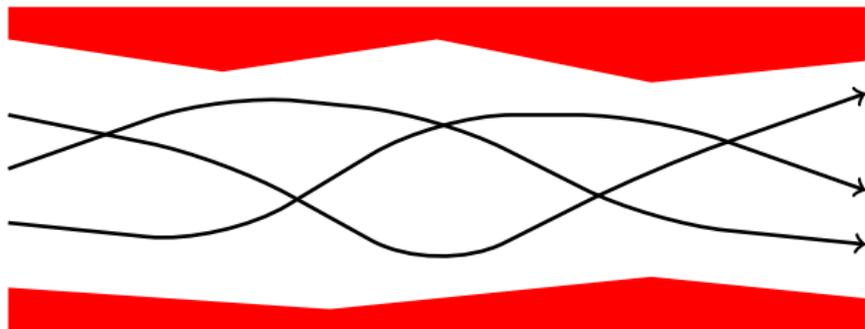

# Using static analysis for verification


(Also known as “static debugging”)

Use the results of static analysis to prove the absence of run-time errors:

$$b \in [n_1, n_2] \wedge 0 \notin [n_1, n_2] \implies a/b \text{ cannot fail}$$

$$\text{valid}(p[n_1 \dots n_2]) \wedge i \in [n_1, n_2] \implies *(p + i) \text{ cannot fail}$$


Signal an **alarm** otherwise.

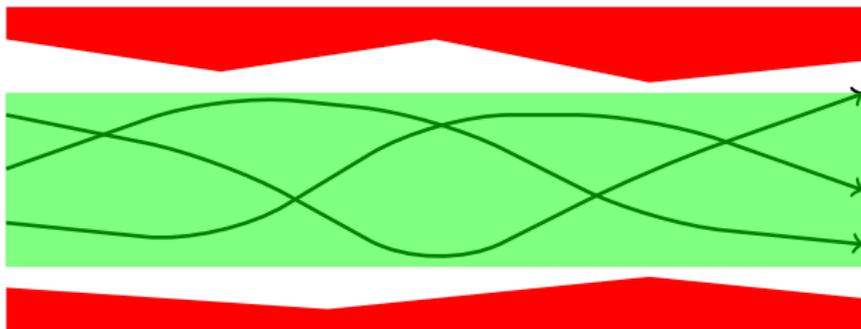


## True alarms, false alarms



True alarm  
(dangerous behavior)

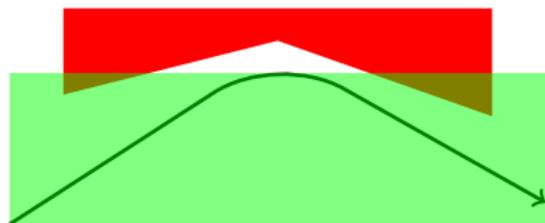

False alarm  
(imprecise analysis)

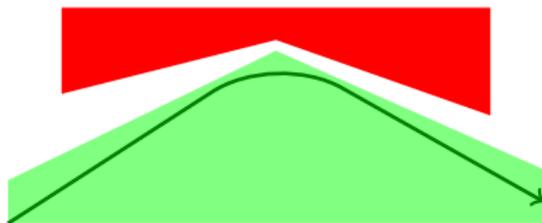

More precise analysis (polyhedra instead of intervals):  
false alarm goes away.

# Some properties verifiable by static analysis

## Absence of run-time errors:

- Arrays and pointers:
  - ▶ No out-of-bound accesses.
  - ▶ No dereferencing of null pointers.
  - ▶ No accesses after a free.
  - ▶ Alignment constraints of the processor.
- Integers:
  - ▶ No division by zero.
  - ▶ No overflows in (signed) arithmetic.
- Floating-point numbers:
  - ▶ No arithmetic overflows (infinite results).
  - ▶ No undefined operations (not-a-number results).
  - ▶ No catastrophic cancellations.

## Variation intervals for program outputs.

## Floating-point subtleties and their analysis

Taking **rounding** into account:

```
float x, y, u, v;           // x ∈ [1.00025, 2]
                             // y ∈ [0.5, 1]
u = 1 / (x - y);           // OK
v = 1 / (x*x - y*y);       // ALARM: undefined result
```

First division:  $(x - y) \in [0.00025, 1.5]$  and division cannot result in infinity or not-a-number.

Second division:

$$\begin{aligned}(x*x) &\in [1, 4] && \text{(float rounding!)} \\(y*y) &\in [0.25, 1] \\(x*x - y*y) &\in [0, 3.75]\end{aligned}$$

and division by zero is possible, resulting in  $+\infty$

# A generic static analyzer

- 11 Introduction to static analysis
- 12 Static analysis as an abstract interpretation**
- 13 An abstract interpreter in Coq
- 14 Improving the generic static analyzer

# Abstract interpretation for dummies

“Execute” the program using a non-standard semantics that:

- Computes over an **abstract domain** of the desired properties (e.g. “ $x \in [n_1, n_2]$ ” for interval analysis) instead of **concrete** “things” like values and states.
- Handles boolean conditions, even if they cannot be resolved statically. (THEN and ELSE branches of IF are considered both taken.) (WHILE loops execute arbitrarily many times.)
- Always terminates.

## Orthodox presentation: collecting semantics

Define a semantics that collects all possible concrete states at every program point.

```
// initial value of x is N
```

```
y := 1;
```

```
WHILE x > 0 DO
```

```
  y := y * 2;
```

```
  x := x - 1
```

```
END
```

$(x, y) \in \{ (N, 1) \}$

$(x, y) \in \{ (N, 1); (N-1, 2); \dots; (1, 2^{N-1}) \}$

$(x, y) \in \{ (N, 2); (N-1, 4); \dots; (1, 2^N) \}$


$(x, y) \in \{ (N-1, 2); \dots; (0, 2^N) \}$

$(x, y) \in \{ (0, 2^N) \}$

# Orthodox presentation: Galois connection

Define a lattice  $\mathcal{A}, \leq$  of **abstract states** and two functions:

- **Abstraction function**  $\alpha$  : sets of concrete states  $\rightarrow$  abstract state
- **Concretization function**  $\gamma$  : abstract state  $\rightarrow$  sets of concrete states

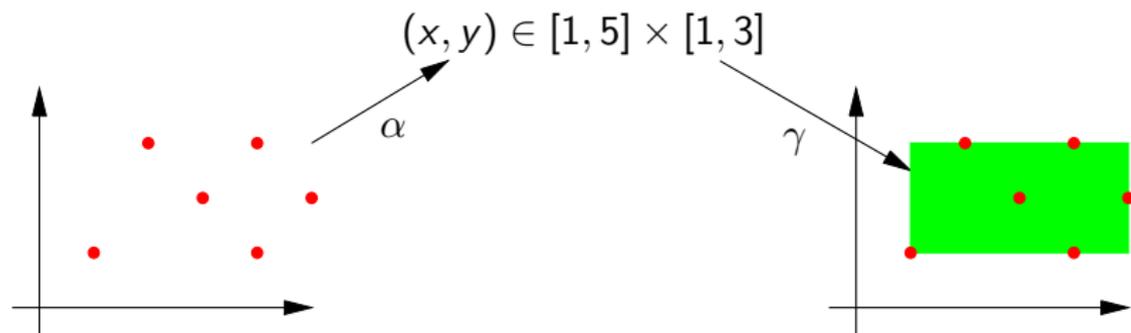

$\alpha$  and  $\gamma$  monotonic;  $X \subseteq \gamma(\alpha(X))$ ; and  $x^\# \leq \alpha(\gamma(x^\#))$ .

## Orthodox presentation: calculating abstract operators

For each operation of the language, compute its abstract counterpart (operating on elements of  $\mathcal{A}$  instead of concrete values and states).

Example: for the  $+$  operator in expressions,

$$a_1 +^\# a_2 = \alpha\{n_1 + n_2 \mid n_1 \in \gamma(a_1), n_2 \in \gamma(a_2)\}$$

(... calculations omitted ...)

$$[l_1, u_1] +^\# [l_2, u_2] = [l_1 + l_2, u_1 + u_2]$$

$+^\#$  is sound and optimally precise by construction.

## Pedestrian Coq presentation

Focus on the concretization relation  $x \in \gamma(y)$  viewed as a 2-place predicate *concrete-thing*  $\rightarrow$  *abstract-thing*  $\rightarrow$  Prop.

Forget about the abstraction function  $\alpha$   
(generally not computable; often not uniquely defined.)

Forget about calculating the abstract operators: just guess their definitions and prove their soundness.

Forget about optimality; focus on soundness only.

# A generic static analyzer

- 11 Introduction to static analysis
- 12 Static analysis as an abstract interpretation
- 13 An abstract interpreter in Coq**
- 14 Improving the generic static analyzer

# Abstract domains in Coq

Specified as **module interfaces**:

- `VALUE_ABSTRACTION`: to abstract integer values.
- `STATE_ABSTRACTION`: to abstract states.

(See Coq file `Analyzer1.v`.)

Each interface declares:

- A type `t` of abstract “things”
- A predicate `vmatch/smacth` relating concrete and abstract things.
- Abstract operations on type `t`  
(arithmetic operations for values; `get` and `set` operations for stores).
- Soundness properties of these operations.

# Abstract interpretation of arithmetic expressions

Let  $V$  be a value abstraction and  $S$  a corresponding state abstraction.

```
Fixpoint abstr_eval (s: S.t) (a: aexp) : V.t :=
  match a with
  | ANum n => V.of_const n
  | AId x => S.get s x
  | APlus a1 a2 => V.add (abstr_eval s a1) (abstr_eval s a2)
  | AMinus a1 a2 => V.sub (abstr_eval s a1) (abstr_eval s a2)
  | AMult a1 a2 => V.mul (abstr_eval s a1) (abstr_eval s a2)
  end.
```

(What else could we possibly write?)

## Abstract interpretation of commands

Computes the abstract state “after” executing command  $c$  in initial abstract state  $s$ .

```
Fixpoint abstr_interp (s: S.t) (c: com) : S.t :=
  match c with
  | SKIP => s
  | (x ::= a) => S.set s x (abstr_eval s a)
  | (c1; c2) => abstr_interp (abstr_interp s c1) c2
  | IFB b THEN c1 ELSE c2 FI =>
      S.join (abstr_interp s c1) (abstr_interp s c2)
  | WHILE b DO c END =>
      fixpoint (fun x => S.join s (abstr_interp x c)) s
  end.
```

## Abstract interpretation of commands

```
Fixpoint abstr_interp (s: S.t) (c: com) : S.t :=
  match c with
  | SKIP => s
  | (x ::= a) => S.set s x (abstr_eval s a)
  | (c1; c2) => abstr_interp (abstr_interp s c1) c2
  | IFB b THEN c1 ELSE c2 FI =>
      S.join (abstr_interp s c1) (abstr_interp s c2)
  | WHILE b DO c END =>
      fixpoint (fun x => S.join s (abstr_interp x c)) s
  end.
```

For the time being, we do not try to guess the value of a boolean test  
→ consider the THEN branch and the ELSE branch as both taken  
→ take an upper bound of their final states.

## Abstract interpretation of commands

```
Fixpoint abstr_interp (s: S.t) (c: com) : S.t :=
  match c with
  | SKIP => s
  | (x ::= a) => S.set s x (abstr_eval s a)
  | (c1; c2) => abstr_interp (abstr_interp s c1) c2
  | IFB b THEN c1 ELSE c2 FI =>
      S.join (abstr_interp s c1) (abstr_interp s c2)
  | WHILE b DO c END =>
      fixpoint (fun x => S.join s (abstr_interp x c)) s
  end.
```

Let  $s'$  be the abstract state “before” the loop body  $c$ .

- entering  $c$  on the first iteration  $\Rightarrow s \leq s'$ .
- re-entering  $c$  at next iteration  $\Rightarrow \text{abstr\_interp } s' c \leq s'$ .

Therefore compute a post-fixpoint  $s'$  such that  $s \sqcup \text{abstr\_interp } s' c \leq s'$

## Soundness results

Show that all concrete executions produce results that belong to the abstract things inferred by abstract interpretation.

Lemma `abstr_eval_sound`:

```
forall st s, S.smatch st s ->  
forall a, V.vmatch (aeval st a) (abstr_eval s a).
```

Theorem `abstr_interp_sound`:

```
forall c st st' s,  
S.smatch st s ->  
c / st || st' ->  
S.smatch st' (abstr_interp s c).
```

(Easy structural inductions on `a` and `c`.)

## An example of state abstraction


Parameterized by a value abstraction  $V$ .

Abstract states =  $\perp$  | finite maps  $ident \rightarrow V.t.$  (Default value:  $V.top.$ )

Appropriate for all non-relational analyses.

## An example of value abstraction: constants

Abstract domain = the flat lattice of integers:

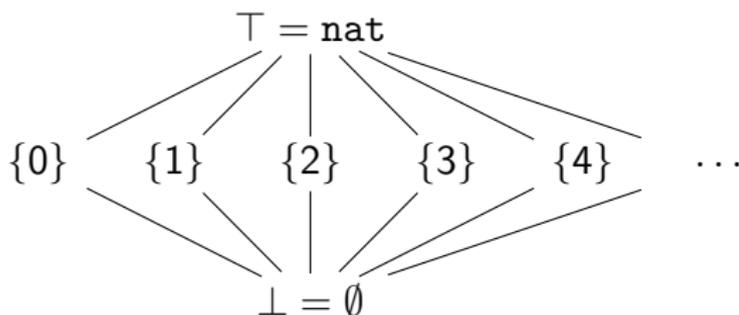

Obvious interpretation of operations:

$$\perp +^\# x = x +^\# \perp = \perp \quad \top +^\# x = x +^\# \top = \top \quad \{n_1\} +^\# \{n_2\} = \{n_1 + n_2\}$$

# A generic static analyzer

- 11 Introduction to static analysis
- 12 Static analysis as an abstract interpretation
- 13 An abstract interpreter in Coq
- 14 Improving the generic static analyzer**

## First improvement: static analysis of boolean expressions

Our analyzer makes no attempt at analyzing boolean expressions  
→ both arms of an IF are always assumed taken.

Can do better when the static information available allows to statically resolve the IF. Example:

```
x := 0;  
IF x = 0 THEN y := 1 ELSE y := 2 FI
```

Constant analysis in its present form returns  $y^\# = \top$   
(joining the two branches where  $y^\# = \{1\}$  and  $y^\# = \{2\}$ .)

Since  $x^\# = \{0\}$  before the IF, the ELSE branch cannot be taken, hence we should have  $y^\# = \{1\}$  at the end.

# Static analysis of boolean expressions

Even when the boolean expression cannot be resolved statically, the analysis can learn much from which branch of an IF is taken.

```
IF x = 0 THEN
```

```
    y := x + 1
```

```
ELSE
```

```
    y := 1
```

```
FI
```

$x^\# = \top$  initially

learn that  $x^\# = \{0\}$

hence  $y^\# = \{1\}$

$y^\# = \{1\}$  as well

hence  $y^\# = \{1\}$ , not  $\top$

# Static analysis of boolean expressions

We can also learn from the fact that a WHILE loop terminates:

```
                                 $x^\# = \top$  initially  
WHILE not (x = 42) DO  
    x := x + 1  
DONE
```

learn that  $x^\# = 42^\# = \{42\}$

More realistic example using intervals instead of constants:

```
                                 $x^\# = \top = [0, \infty]$  initially  
WHILE x <= 1000 DO  
    x := x + 1  
DONE
```

learn that  $x^\# = [1001, \infty]$

## Inverse analysis of expressions

`learn_from_test`  $s$   $b$   $res$  :

return abstract state  $s' \leq s$  reflecting the fact that  $b$  (a boolean expression) evaluates to  $res$  (one of true or false).

`learn_from_eval`  $s$   $a$   $res$  :

return abstract state  $s' \leq s$  reflecting the fact that  $a$  (an arithmetic expression) evaluates to a value matching  $res$  (an abstract value).

Examples:

`learn_from_test`  $(x \mapsto \top)$   $(x = 0)$  true =  $(x \mapsto \{0\})$

`learn_from_test`  $(x \mapsto \{1\})$   $(x = 0)$  true =  $\perp$

`learn_from_eval`  $(x \mapsto \top)$   $(x + 1)$  {10} =  $(x \mapsto \{9\})$

## Inverse analysis of expressions

The abstract domain for values is enriched with **inverse abstract operators** `add_inv`, etc and **inverse abstract tests** `eq_inv`, etc.

Examples with intervals:

`le_inv [0,10] [2,5] = ([0,5], [2,5])`

`add_inv [0,1] [0,1] [0,0] = ([0,0], [0,0])`

# Inverse analysis of expressions

In orthodox presentation:

$$\begin{aligned} \text{le\_inv } x^\# \ y^\# &= (\alpha\{x \mid x \in \gamma(x^\#), y \in \gamma(y^\#), x \leq y\}, \\ &\quad \alpha\{y \mid x \in \gamma(x^\#), y \in \gamma(y^\#), x \leq y\}) \\ \text{add\_inv } x^\# \ y^\# \ z^\# &= (\alpha\{x \mid x \in \gamma(x^\#), y \in \gamma(y^\#), x + y \in \gamma(z^\#)\}, \\ &\quad \alpha\{y \mid x \in \gamma(x^\#), y \in \gamma(y^\#), x + y \in \gamma(z^\#)\}) \end{aligned}$$

In Coq: see file Analyzer2.v.

## Using inverse analysis

```
Fixpoint abstr_interp (s: S.t) (c: com) : S.t :=
  match c with
  | SKIP => s
  | x ::= a => S.set s x (abstr_eval s a)
  | (c1; c2) => abstr_interp (abstr_interp s c1) c2
  | IFB b THEN c1 ELSE c2 FI =>
      S.join (abstr_interp (learn_from_test s b true) c1)
             (abstr_interp (learn_from_test s b false) c2)
  | WHILE b DO c END =>
      let s' :=
          fixpoint
            (fun x => S.join s
                      (abstr_interp (learn_from_test x b true) c))
          s in
          learn_from_test s' b false
      end.
```

## Second improvement: accelerating convergence

Consider the computation of (post-) fixpoints when analyzing loops.

Remember the two approaches previously discussed:

- 1 The mathematician's approach based on the Knaster-Tarski theorem. (Only if the abstract domain is well-founded, e.g. the domain of constants.)
- 2 The engineer's approach:  
force convergence to  $\top$  after a bounded number of iterations.

1- is often not applicable or too slow.

2- produces excessively coarse results.

## Non-well-founded domains

Many interesting abstract domains are not well-founded.

Example: intervals.

$$[0, 0] \subset [0, 1] \subset [0, 2] \subset \dots \subset [0, n] \subset \dots$$

This causes problems for analyzing non-counted loops such as

```
x := 0;  
WHILE unpredictable-condition DO x := x + 1 END
```

( $x^\sharp$  is successively  $[0, 0]$  then  $[0, 1]$  then  $[0, 2]$  then ...)

## Slow convergence

In other cases, the fixpoint computation via Tarski's method does terminate, but takes too much time.

```
x := 0;  
WHILE x <= 1000 DO x := x + 1 END
```

(Starting with  $x^\sharp = [0, 0]$ , it takes 1000 iterations to reach  $x^\sharp = [0, 1000]$ , which is a fixpoint.)

## Imprecise convergence

The engineer's algorithm (return  $\top$  after a fixed number of unsuccessful iterations) does converge quickly, but loses too much information.

```
x := 0;  
y := 0;  
WHILE x <= 1000 DO x := x + 1 END
```

In the final abstract state, not only  $x^\sharp = \top$ , but also  $y^\sharp = \top$ .

## Widening

A **widening** operator  $\nabla : \mathcal{A} \rightarrow \mathcal{A} \rightarrow \mathcal{A}$  computes an upper bound of its second argument in such a way that the following fixpoint iteration always converges (and converges quickly):

$$X_0 = \perp \quad X_{i+1} = \begin{cases} X_i & \text{if } F(X_i) \leq X_i \\ X_i \nabla F(X_i) & \text{otherwise} \end{cases}$$

The limit  $X$  of this sequence is a post-fixpoint:  $F(X) \leq X$ .

For intervals of natural numbers, the classic widening operator is:

$$[l_1, u_1] \nabla [l_2, u_2] = [(\text{if } l_2 < l_1 \text{ then } 0 \text{ else } l_1, \\ \text{if } u_2 > u_1 \text{ then } \infty \text{ else } u_1)]$$

## Example of widening

```
x := 0;  
WHILE x <= 1000 DO x := x + 1 END
```

The transfer function for  $x$ 's abstraction is  
 $F(X) = [0, 0] \cup (X \cap [0, 1000]) + 1$ .

$$X_0 = \perp$$


$$X_1 = X_0 \nabla F(X_0) = \perp \nabla [0, 0] = [0, 0]$$

$$X_2 = X_1 \nabla F(X_1) = [0, 0] \nabla [0, 1] = [0, \infty]$$

$$X_2 \text{ is a post-fixpoint: } F(X_2) = [0, 1001] \subseteq [0, \infty].$$

Final abstract state is  $x^\sharp = [0, \infty] \cap [1001, \infty] = [1001, \infty]$ .

## Widening in action

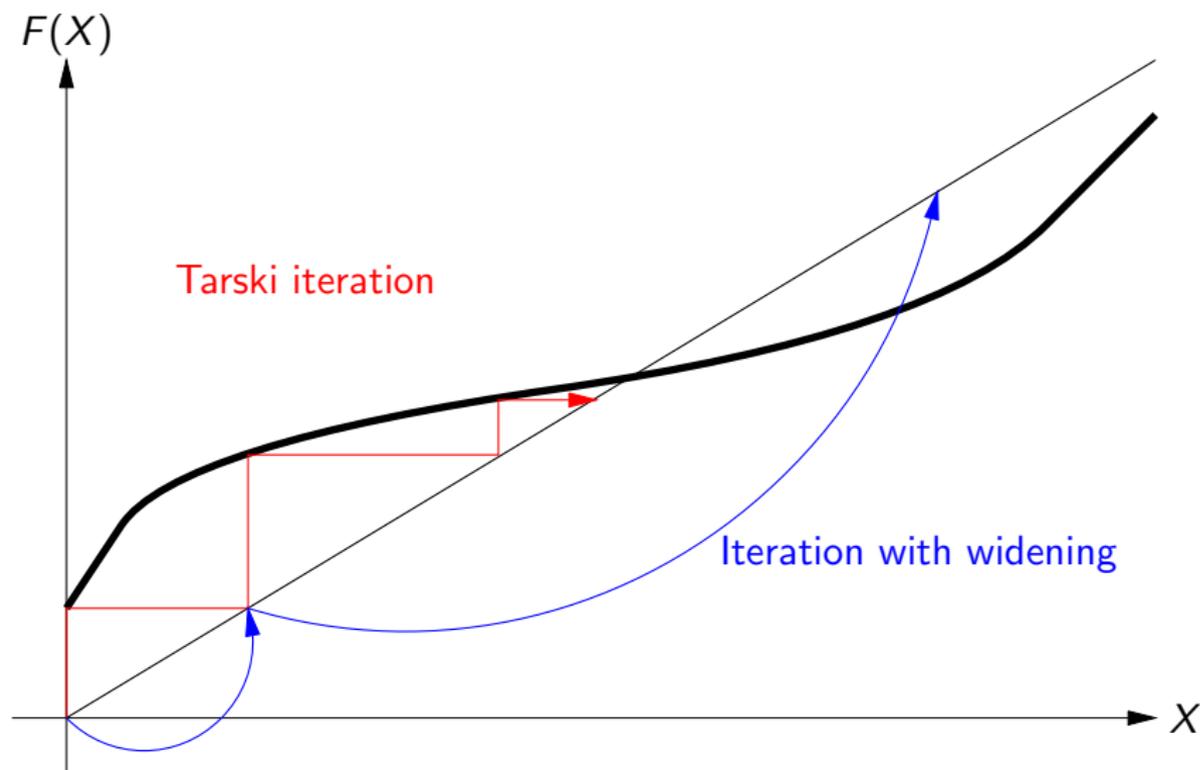

## Refining the fixpoint

The quality of a post-fixpoint can be improved by iterating  $F$  some more:


$$Y_0 = \text{a post-fixpoint} \quad Y_{i+1} = F(Y_i)$$

If  $F$  is monotone, each of the  $Y_i$  is a post-fixpoint:  $F(Y_i) \leq Y_i$ .

Often,  $Y_i < Y_0$ , so we obtain a more precise post-fixpoint.

We can stop iteration when a  $Y_i$  is a fixpoint, or at any convenient time.

## Widening plus refinement in action

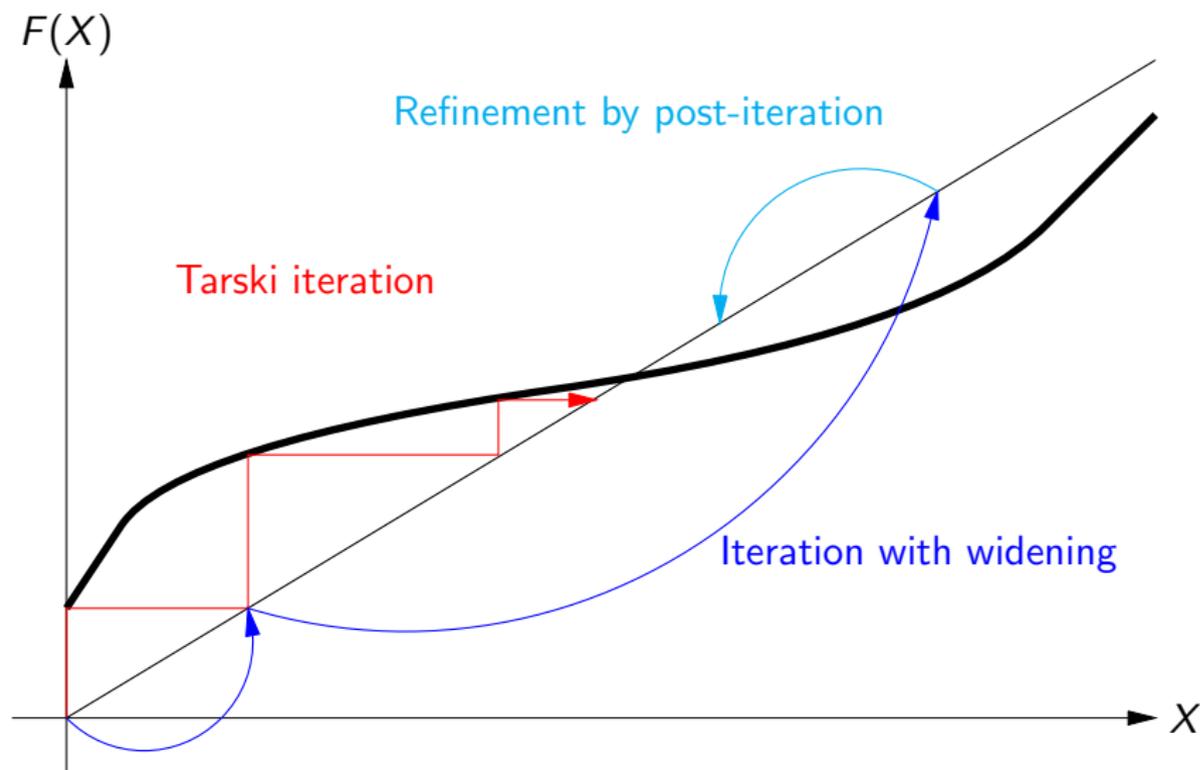

## Example of refinement

```
x := 0;  
WHILE x <= 1000 DO x := x + 1 END
```

The transfer function for  $x$ 's abstraction is

$$F(X) = [0, 0] \cup (X \cap [0, 1000]) + 1.$$

The post-fixpoint found by iteration with widening is  $[0, \infty]$ .

$$Y_0 = [0, \infty]$$

$$Y_1 = F(Y_0) = [0, 1001]$$

$$Y_2 = F(Y_1) = [0, 1001]$$

Final post-fixpoint is  $Y_1$  (actually, a fixpoint).

Final abstract state is  $x^\sharp = [0, 1001] \cap [1001, \infty] = [1001, 1001]$ .

# Specification of widening operators

For reference:

- $y \leq x \nabla y$  for all  $x, y$ .
- For all increasing sequences  $x_0 \leq x_1 \leq \dots$ , the sequence  $y_0 = x_0, y_{i+1} = y_i \nabla x_i$  is not strictly increasing.

## Coq implementation of accelerated convergence

Because we have not proved the monotonicity of `abstr_interp` nor the nice properties of widening, we still bound arbitrarily the number of iterations.

```
Fixpoint iter_up (n: nat) (s: S.t) : S.t :=
  match n with
  | 0 => S.top
  | S n1 =>
    let s' := F s in
    if S.ble s' s then s else iter_up n1 (S.widen s s')
  end.
```

```
Fixpoint iter_down (n: nat) (s: S.t) : S.t :=
  match n with
  | 0 => s
  | S n1 =>
    let s' := F s in
    if S.ble (F s') s' then iter_down n1 s' else s
  end.
```

```
Definition fixpoint (start: S.t) : S.t :=
  iter_down num_iter_down (iter_up num_iter_up start).
```

## In summary...

The abstract interpretation approach leads to highly modular static analyzers:

- The language-specific parts of the analyzer are written once and for all.
- It can then be combined with various abstract domains, which are largely independent of the programming language analyzed.
- Domains can be further combined together (e.g. by reduced product).

The technical difficulty is concentrated in the definition and implementation of domains, esp. the widening and narrowing operators.

Relational analyses are much more difficult (but much more precise!) than the non-relational analyses presented here.

# Static analysis tools in the real world

General-purpose tools:

- Coverity
- MathWorks Polyspace verifier.
- Frama-C value analyzer (open source!)
- Microsoft's Code Contract

Tools specialized to an application area:

- Microsoft Static Driver Verifier (Windows system code)
- Astrée (control-command code at Airbus)
- Fluctuat (symbolic analysis of floating-point errors)

Tools for non-functional properties:

- aiT WCET (worst-case execution time)
- aiT StackAnalyzer (stack consumption)


# Part VIII

## Compiler verification in the large


# Compiler verification in the large

- 15 Compiler issues in critical software
- 16 The CompCert project
- 17 Status and ongoing challenges
- 18 Closing


# The classroom setting

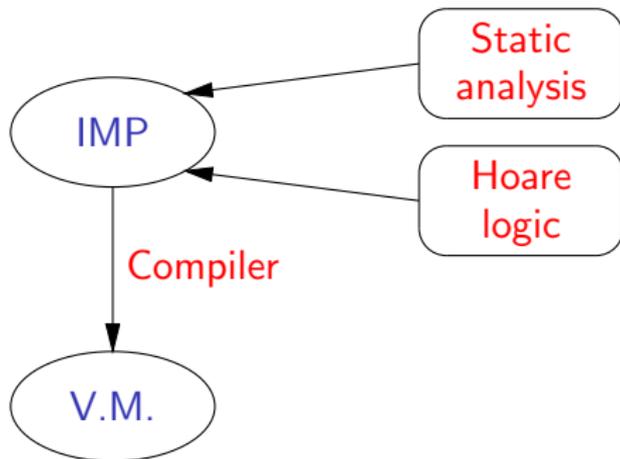



# The reality of critical embedded software

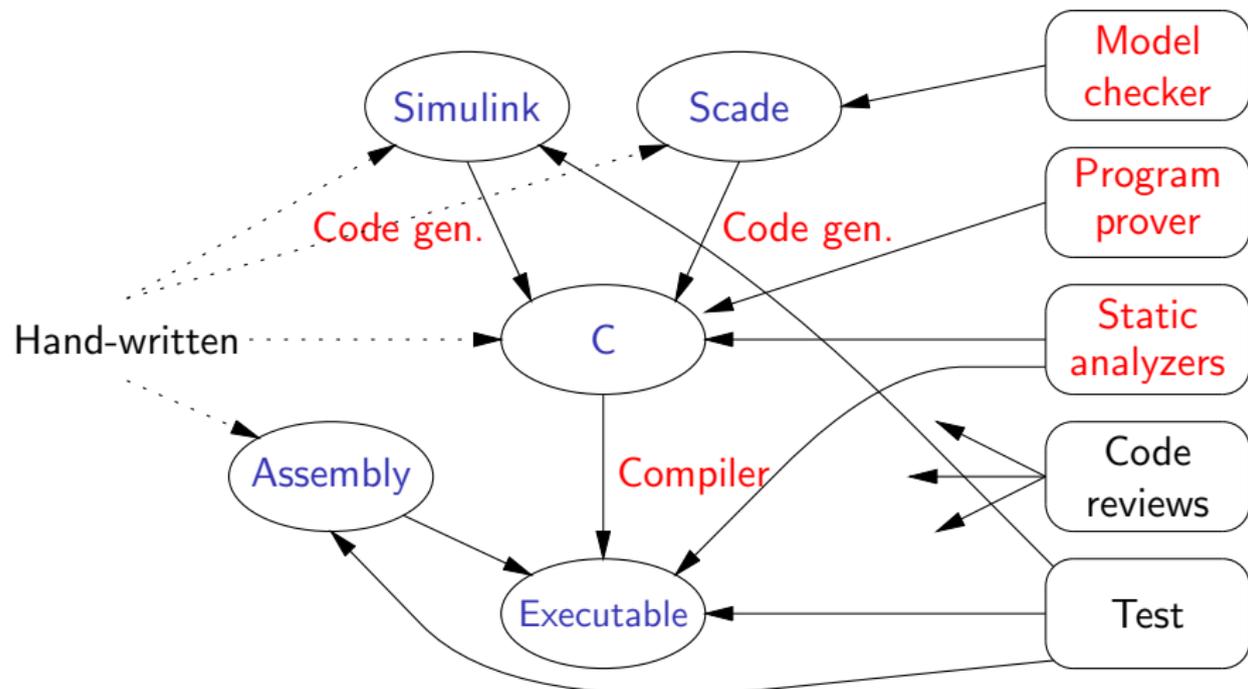

## Example: fly-by-wire software

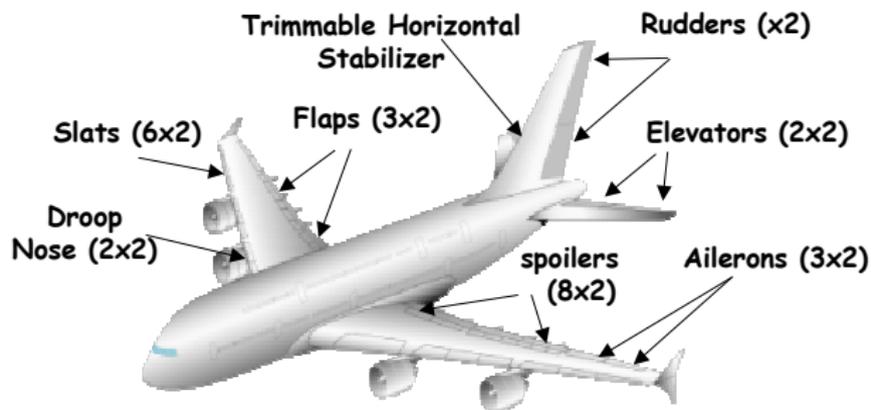

# Example: fly-by-wire software

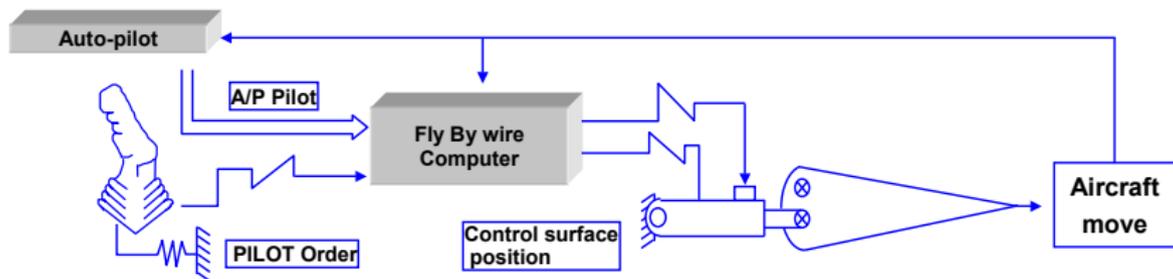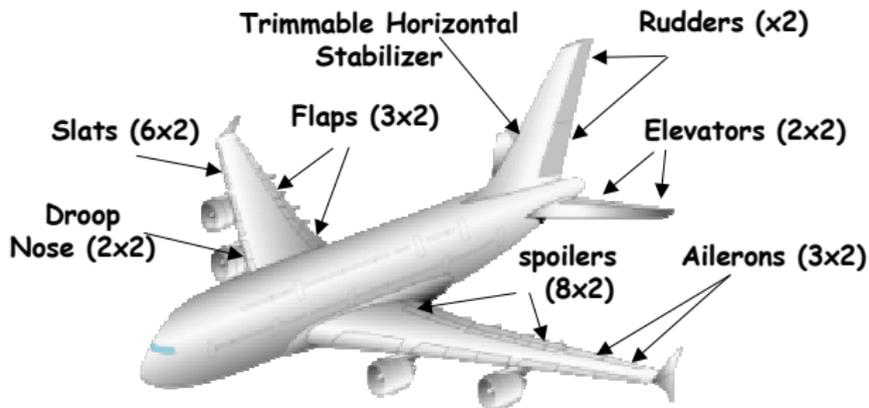

(G. Ladier)

# Requirements for qualification

(E.g. DO178-B in avionics.)

**Compilers and code generation tools:** Can introduce bugs in programs!

- Either: the code generator is qualified at the same level of assurance as the application.  
(Implies: much testing, rigorous development process, no recursion, no dynamic allocation, ...)
- Or: the generated code needs to be qualified as if hand-written.  
(Implies: testing, code review and analysis on the generated code ...)

**Verification tools used for bug-finding:**

Cannot introduce bugs, just fail to notice their presence.

→ can be qualified at lower levels of assurance.

**Verification tools used to establish the absence of certain bugs:**

Status currently unclear.

# The compiler dilemma

If the compiler is untrusted (= not qualified at the highest levels of assurance):

- We still need to review & analyze the generated assembly code, which implies turning off optimizations, and is costly, and doesn't scale.
- We cannot fully trust the results obtained by formal verification of the source program.
- Many benefits of programming in a high-level language are lost.

Yet: the traditional techniques to qualify high-assurance software do not apply to compilers.

Could formal verification of the compiler help?

# Compiler verification in the large

15 Compiler issues in critical software

16 The CompCert project

17 Status and ongoing challenges

18 Closing

# The CompCert project

(X.Leroy, S.Blazy, et al — <http://compcert.inria.fr/>)

Develop and prove correct a realistic compiler, usable for critical embedded software.

- Source language: a subset of C.
- Target language: PowerPC, ARM and x86-32 assembly.
- Generates reasonably compact and fast code  
⇒ some optimizations.

This is “software-proof codesign” (as opposed to proving an existing compiler).

Uses Coq to mechanize the proof of semantic preservation and also to implement most of the compiler.

## The subset of C supported

Supported:

- Types: integers, floats, arrays, pointers, struct, union.
- Operators: arithmetic, pointer arithmetic.
- Control: if/then/else, loops, simple switch, goto.
- Functions, recursive functions, function pointers.


Not supported:

- The long long and long double types.
- Unstructured switch, longjmp/setjmp.
- Variable-arity functions.


Supported via de-sugaring (not proved!):

- Block-scoped variables.
- Returning struct and union by value from functions
- Bit-fields.

# The formally verified part of the compiler

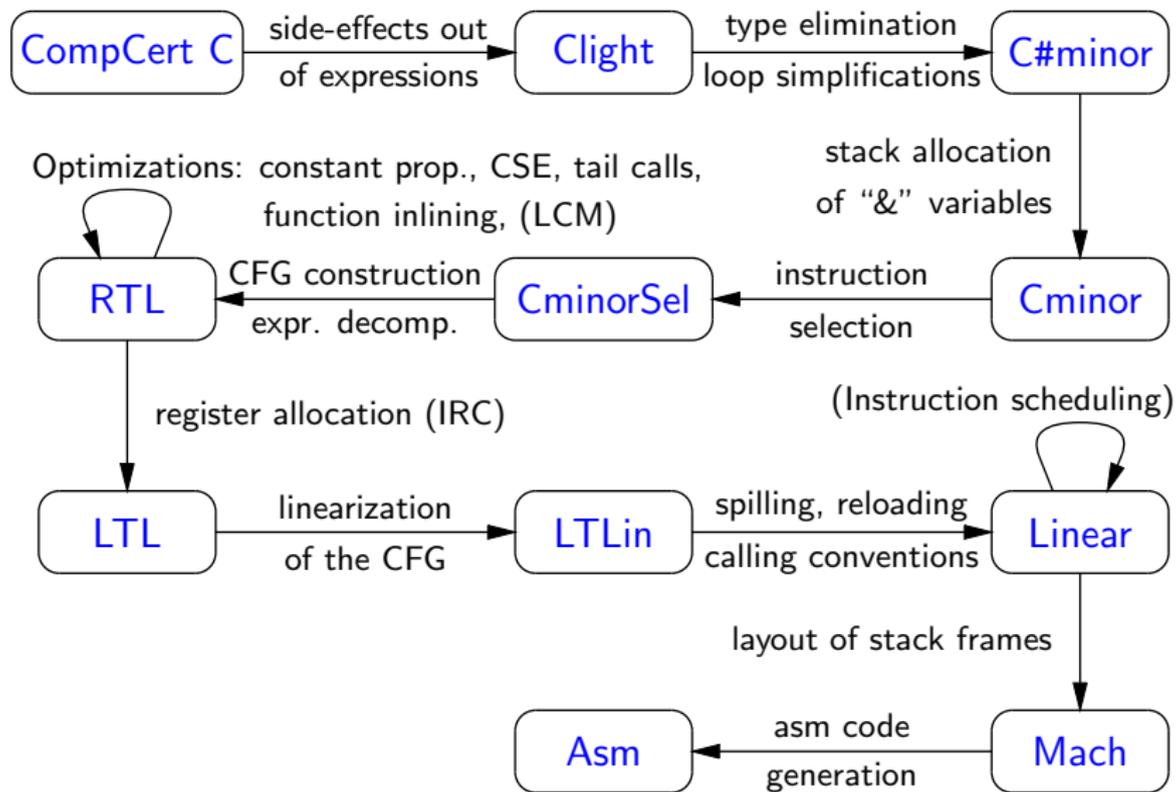

# The whole CompCert compiler

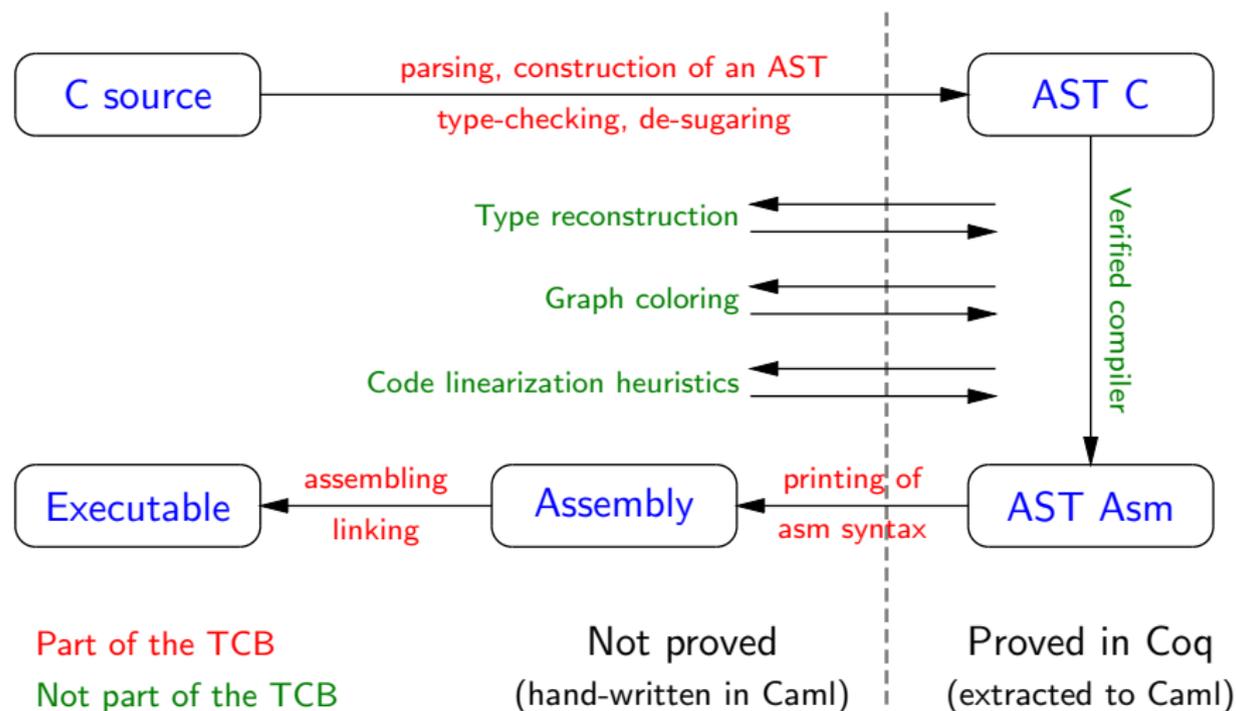

# Verified in Coq

Theorem `transf_c_program_is_refinement`:

```
forall p tp,  
transf_c_program p = OK tp ->  
(forall beh, exec_C_program p beh -> not_wrong beh) ->  
(forall beh, exec_asm_program tp beh -> exec_C_program p beh).
```

A composition of

- 15 proofs of the “safe forward simulation” kind
- 1 proof of the “safe backward simulation” kind.

## Observable behaviors

```
Inductive program_behavior: Type :=  
  | Terminates: trace -> int -> program_behavior  
  | Diverges: trace -> program_behavior  
  | Reacts: traceinf -> program_behavior  
  | Goes_wrong: trace -> program_behavior.
```

trace = list of input-output events.

traceinf = infinite list (stream) of i-o events.

I/O events are generated for:

- Calls to external functions (system calls)
- Memory accesses to global volatile variables (hardware devices).

## Styles of semantics used (as a function of time)

	Clight ... Cminor	RTL ... Mach	Asm
1st gen.	big-step	"mixed-step" (b.s. for calls, (s.s. otherwise)	small-step
2nd gen. (+ divergence)	big-step (coinductive)	small-step (w/ call stacks)	small-step
3rd gen. (+ goto & tailcalls)	small-step (w/ continuations)	small-step (w/ call stacks)	small-step

# The Coq proof

4 person-years of work.

Size of proof: 50000 lines of Coq.

Size of program proved: 8000 lines.

Low proof automation (could be improved).

13%	8%	17%	55%	7%
Code	Sem.Statements		Proof scripts	Misc

## Programmed in Coq

The verified parts of the compiler are directly programmed in Coq's specification language, in pure functional style.


- Monads are used to handle errors and state.
- Purely functional data structures.

Coq's extraction mechanism produces executable Caml code from these Coq definitions, which is then linked with hand-written Caml parts.

*Claim:* pure functional programming is the shortest path between an executable program and its proof.

# Performance of generated code

(On a PowerPC G5 processor)

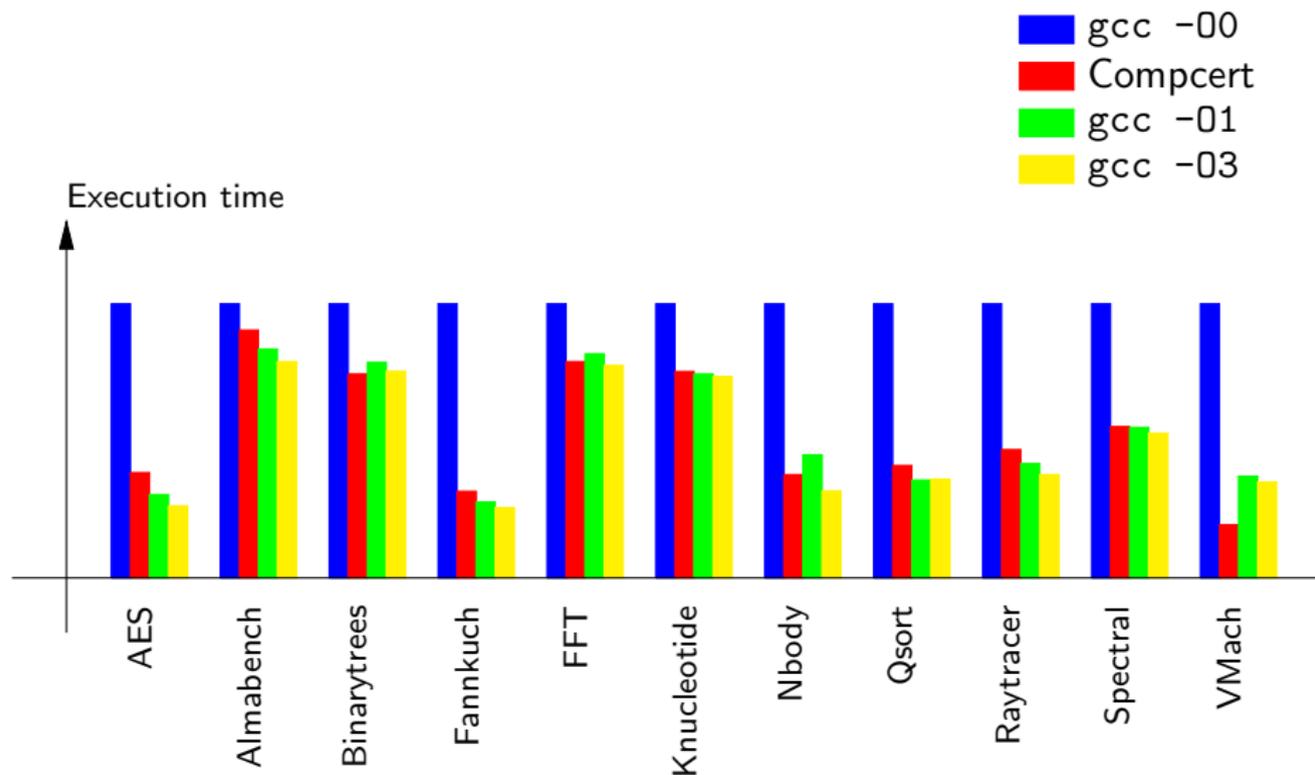

# Compiler verification in the large

15 Compiler issues in critical software

16 The CompCert project

17 Status and ongoing challenges

18 Closing

## Preliminary conclusions

At this stage of the Compcert experiment, the initial goal – proving correct a realistic compiler – appears feasible.

Moreover, proof assistants such as Coq are adequate (but barely) for this task.

What next?

# Enhancements to CompCert

## Upstream:

- Formalize some of the emulated features (bitfields, etc).
- Verified parsing (J.-H. Jourdan), lexing?, preprocessing???

## Downstream:


- Currently, we stop at assembly language with a C-like memory model.
- Refine the memory model to a flat array of bytes.  
(Issues with bounding the total stack size used by the program.)
- Refine to real machine language?  
(Cf. Moore's Piton & Gypsy projects circa 1995)

# Enhancements to CompCert


In the middle:

- More static analyses: nonaliasing, intervals, ...
- More optimizations? Possibly using verified translation validation?

## Verified transformation

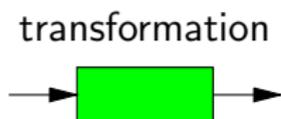

## Verified translation validation

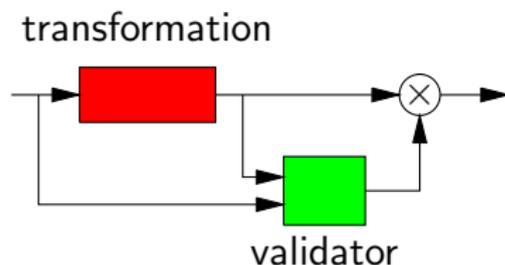

(See e.g. J.B. Tristan's verified translation validators for instruction scheduling, lazy code motion, and software pipelining.)


# Connections with hardware verification

Hardware verification:

- A whole field by itself.
- At the circuit level: a strong tradition of formal synthesis and verification, esp. using model checking.
- At the architectural level (machine language semantics, memory model, ...): almost no publically available formal specifications, let alone verifications.


A very nice work in this area: formalizing the ARM architecture and validating it against the ARM6 micro-architecture.  
(Anthony Fox et al, U. Cambridge).

# The ARM6 micro-architecture

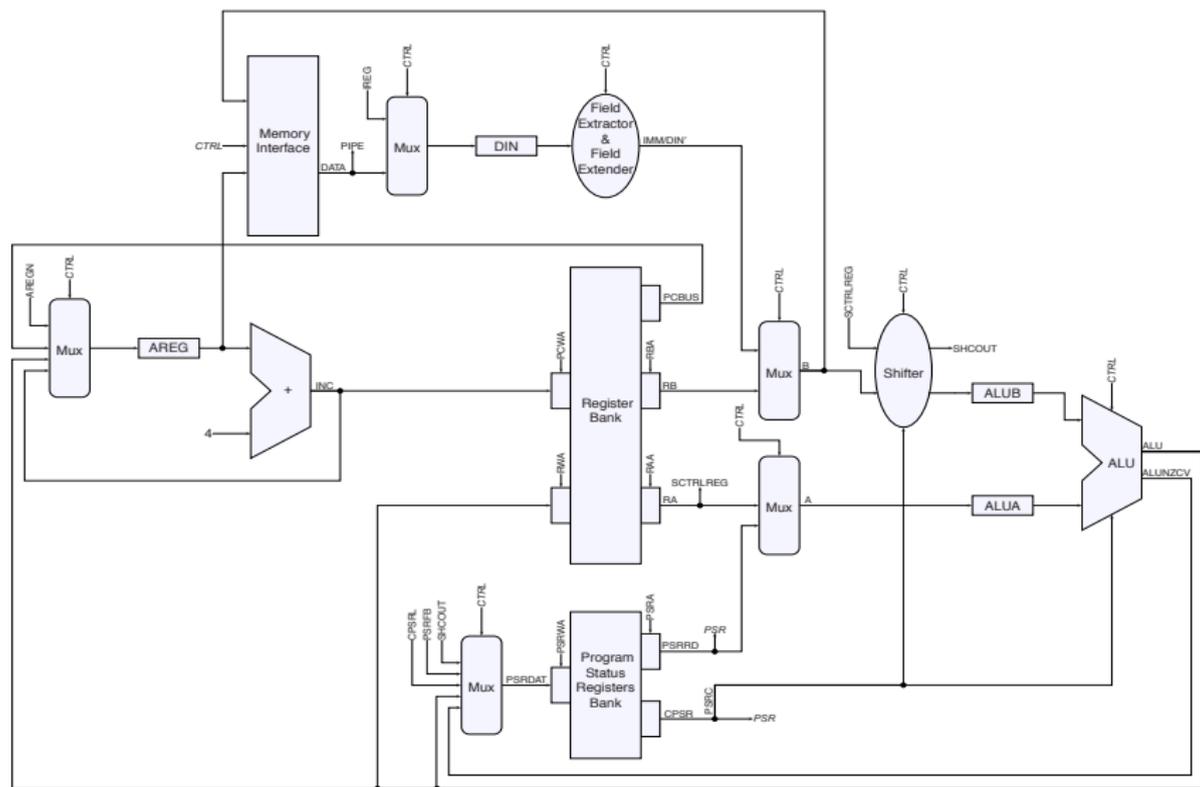




## Other source languages

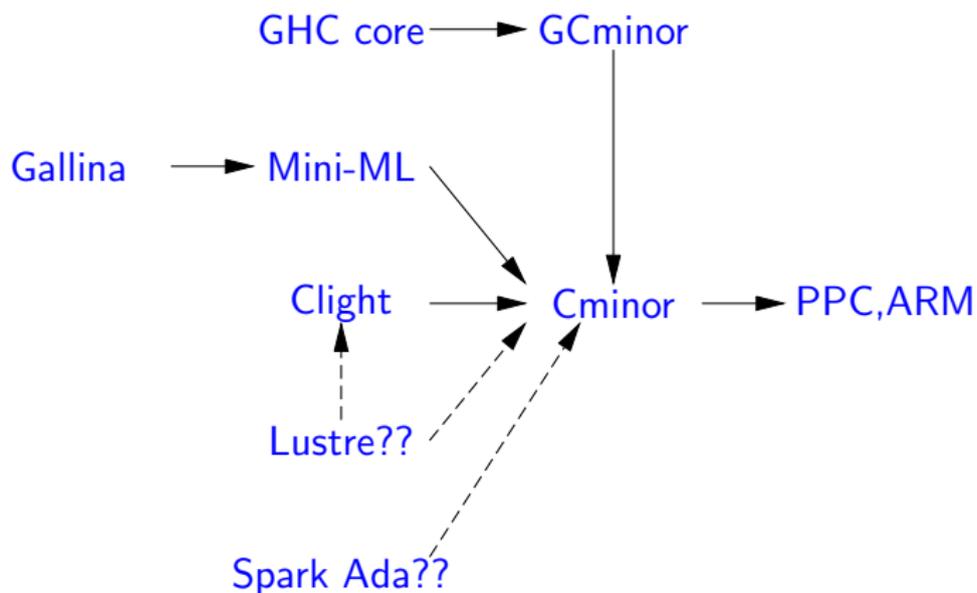

New problem: **run-time system verification** (allocator, GC, etc).

## Connections with verification tools

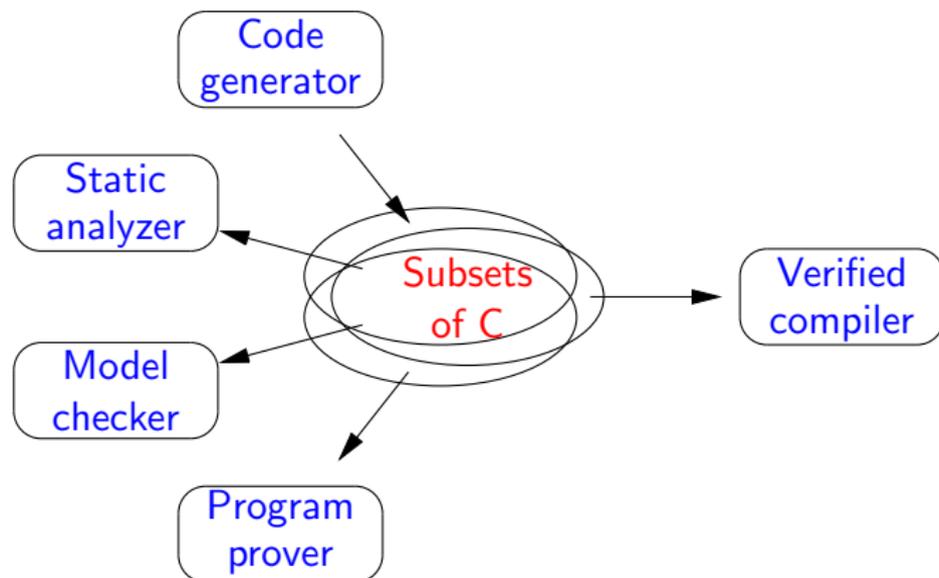

## Connections with verification tools

Code generators, static analyzers, model checkers, program provers, . . .

- deserve formal verification if we are to fully trust their results
- . . . and must be verified against the same semantics as the compiler.

The Verasco project (just started):

- an abstract interpreter for the CompCert languages
- will include advanced relational domains and combinations thereof
- formally verified in Coq.

## Towards shared-memory concurrency

Programs containing **data races** are generally compiled in a non-semantic-preserving manner.

Issue #1: apparently atomic operations are decomposed into sequences of instructions, exhibiting more behaviors.

```
x = *p + *p;      ||      *p = 1;
```

```
t1 = load(p)      ||      store(p, 1)
t2 = load(p)
x = add(t1,t2)
```

In Clight (top): final  $x \in \{0, 2\}$ .

In RTL (bottom): final  $x \in \{0, 1, 2\}$ .

## Towards shared-memory concurrency

Issue #2: **weakly-consistent memory models**, as implemented in hardware, introduce more behaviors than just interleavings of loads and stores.

```
store(q, 1);      ||      store(p, 1);  
x = load(p)      ||      y = load(q)
```

Interleaving semantics:  $(x, y) \in \{(0, 1); (1, 0); (1, 1)\}$ .

Hardware semantics:  $x = 0$  and  $y = 0$  is also possible!

# Plan A

Expose all behaviors in the semantics of all languages (source, intermediate, machine):

- “Very small step” semantics (expression evaluation is not atomic).
- Weakly-consistent model of memory.

Turn off optimizations that are wrong in this setting.  
(common subexpression elimination; uses of nonaliasing properties).

Prove backward simulation results for every pass.

→ The CompCertTSO project at Cambridge

<http://www.cl.cam.ac.uk/~pes20/CompCertTSO/>

## Plan B

Restrict ourselves to **data-race free** source programs . . .

. . . as characterized by **concurrent separation logic**.

## Separation logic (quick reminder)

Like Hoare triples  $\{P\} c \{Q\}$ ,  
but assertions  $P, Q$  control the **memory footprint** of commands  $c$ .

Application: the frame rule

$$\frac{\{P\} c \{Q\}}{\{P \star R\} c \{Q \star R\}}$$

## Concurrent separation logic (intutions)

Two concurrently-running threads do not interfere if their memory footprints are disjoint:

$$\frac{\{P_1\} c_1 \{Q_1\} \quad \{P_2\} c_2 \{Q_2\}}{\{P_1 \star P_2\} (c_1 \parallel c_2) \{Q_1 \star Q_2\}}$$

But how can two threads communicate through shared memory?

## Concurrent separation logic (intutions)

Locks  $L$  are associated with resource invariants  $R$ .

$R$ 's footprint describes the set of shared data protected by lock  $L$ .

Locking  $\Rightarrow$  acquire rights to access this shared data.

Unlocking  $\Rightarrow$  forego rights to access this shared data.

$$\begin{array}{ccc} \{P\} & \text{lock } L & \{P \star R(L)\} \\ \{P \star R(L)\} & \text{unlock } L & \{P\} \end{array}$$

## Quasi-sequential semantics

(Hobor, Appel, Zappa Nardelli, *Oracle Semantics for Concurrent Separation Logic*, ESOP 2008).

For parallel programs provable in concurrent separation logic, we can restrict ourselves to “quasi-sequential” executions:

- In between two lock / unlock operations, each thread executes sequentially; other threads are stopped.
- Interleaving at lock / unlock operations only.
- Interleaving is determined in advance by an “oracle”.

*Claim:* for programs provable in CSL, quasi-sequential semantics and concrete semantics (arbitrary interleavings + weakly-consistent memory) predict the same sets of behaviors.

# Verifying a compiler for data-race free programs

“Just” have to show that quasi-sequential executions are preserved by compilation:

- Easy?? extensions of the sequential case.
- Can still use forward simulation arguments.
- Most classic sequential optimizations remain valid.
- The only “no-no”: moving memory accesses across `lock` and `unlock` operations.

Work in progress, stay tuned . . .

# Compiler verification in the large

- 15 Compiler issues in critical software
- 16 The CompCert project
- 17 Status and ongoing challenges
- 18 Closing

To finish ...

The formal verification of compilers and related programming tools

To finish ...

The formal verification of compilers and related programming tools

... could be worthwhile,

# To finish ...

The formal verification of compilers and related programming tools

... could be worthwhile,

... appears to be feasible,

## To finish ...

The formal verification of compilers and related programming tools

... could be worthwhile,

... appears to be feasible,

... and is definitely exciting!